

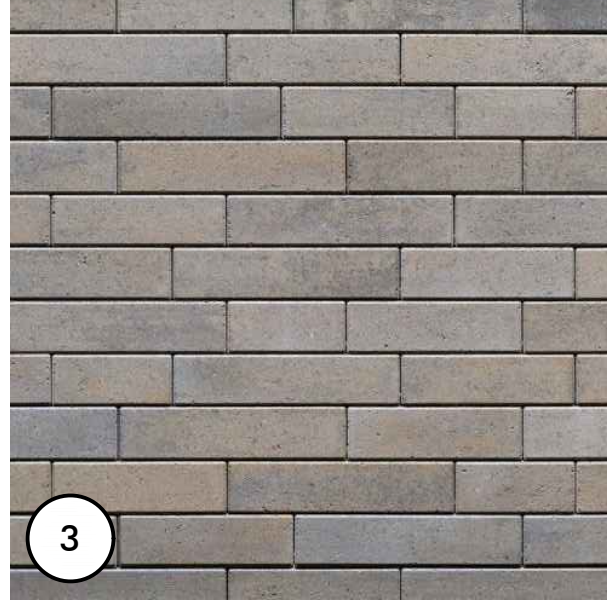




Subject	Length-FT	Area - Single 1	Area 1	CJ Length
Sealant at sidewalk -to- sidewalk Expansion joints - LF	211	0	0	0.00

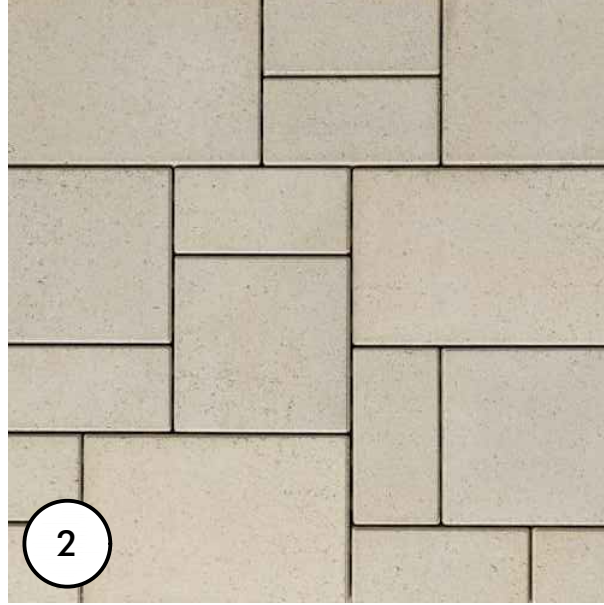



00LL1 ENTRANCE ENLARGEMENT

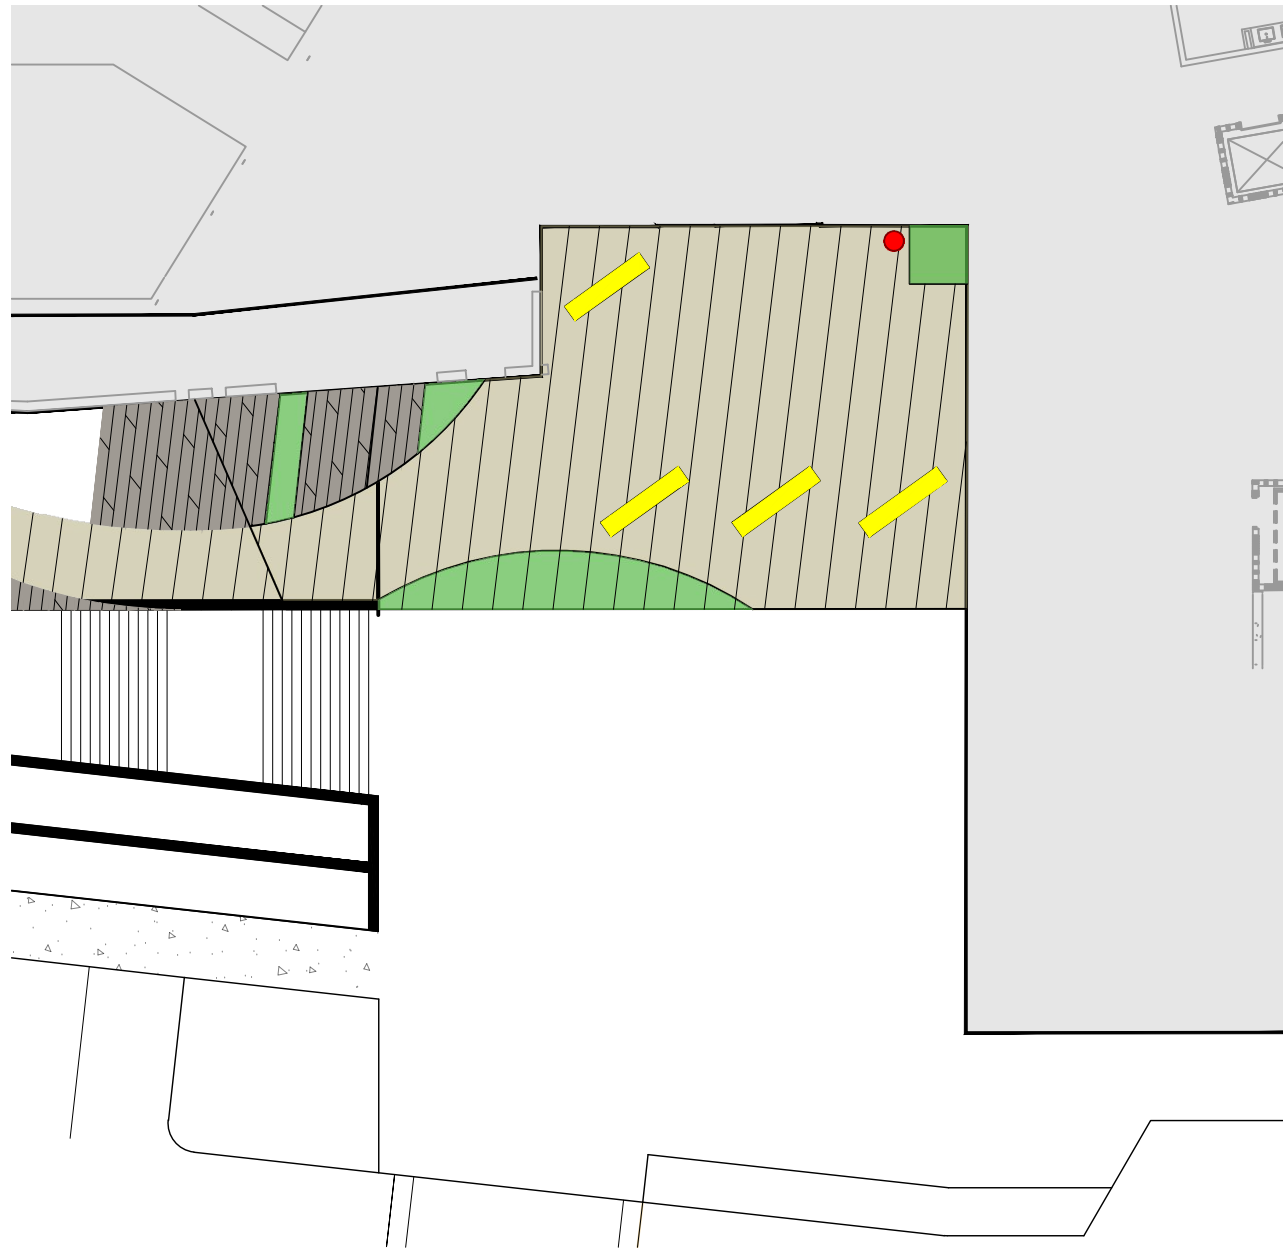

HARDSCAPE KEY		
SYMBOL	NAME	KEY
	DIAMOND GRANITEX PAVERS MANUFACTURER: TECO-BLOC	1
	BLU 90 SMOOTH PAVERS- MANUFACTURER: TECO-BLOC	2
	LINEA PAVERS- MANUFACTURER: TECO-BLOC	3
	WESTMOUNT PAVERS- MA	4
	PERMEABLE PAVERS- SEE CIVIL PLANS	5
	CRUSHED GRANITE 3" DEPTH	6
	CONCRETE SIDEWALK 4" THICK CONCRETE	7
	CUSTOM WATER FEATURE	8
	RETAINING WALL CAST-IN-PLACE CONCRETE WITH WOOD PANEL & CORTEN STEEL (UNLESS LABELED OTHERWISE) ADD ALT.: REDD-ROCK	9
	MULTI-USE TRAIL 4" THICK CONCRETE ADD ALT.: ASPHALT AT 4" DEPTH	10
	CAST-IN-PLACE MONOLITHIC CONCRETE STAIR W/ GLASS RAILING	11

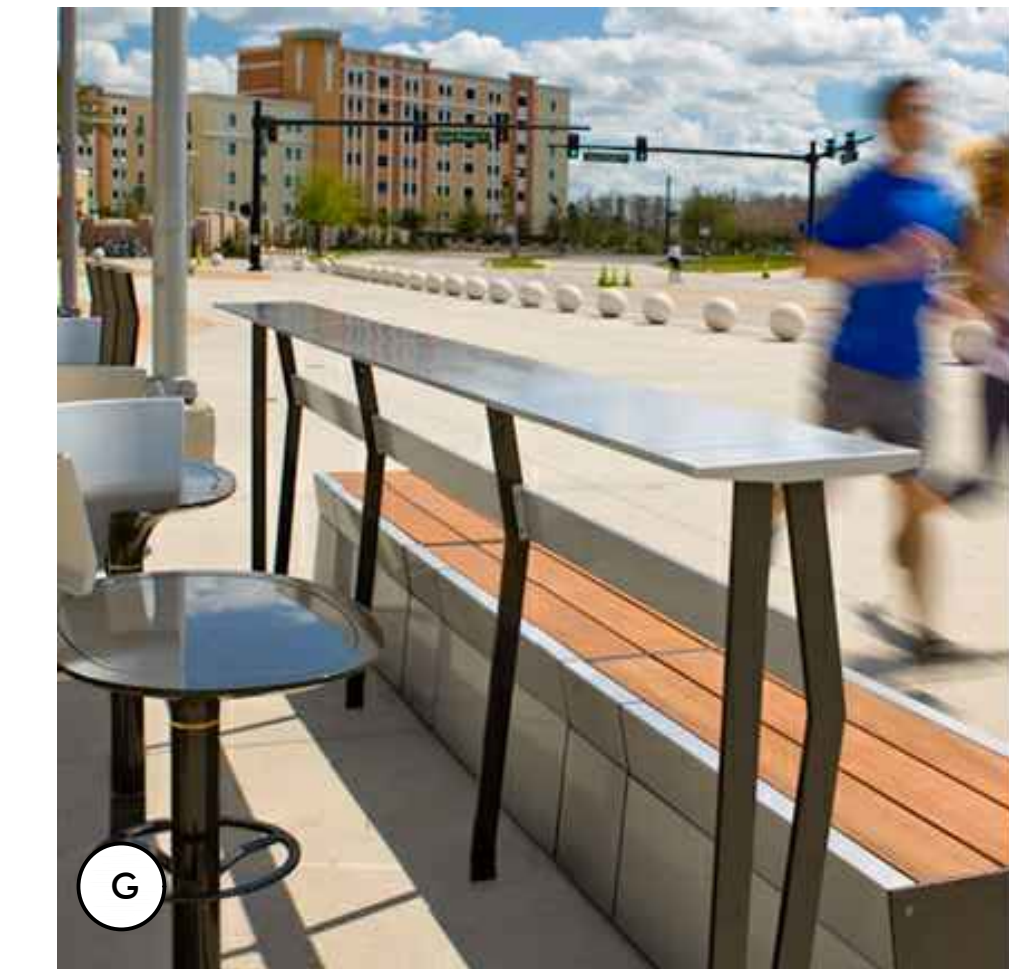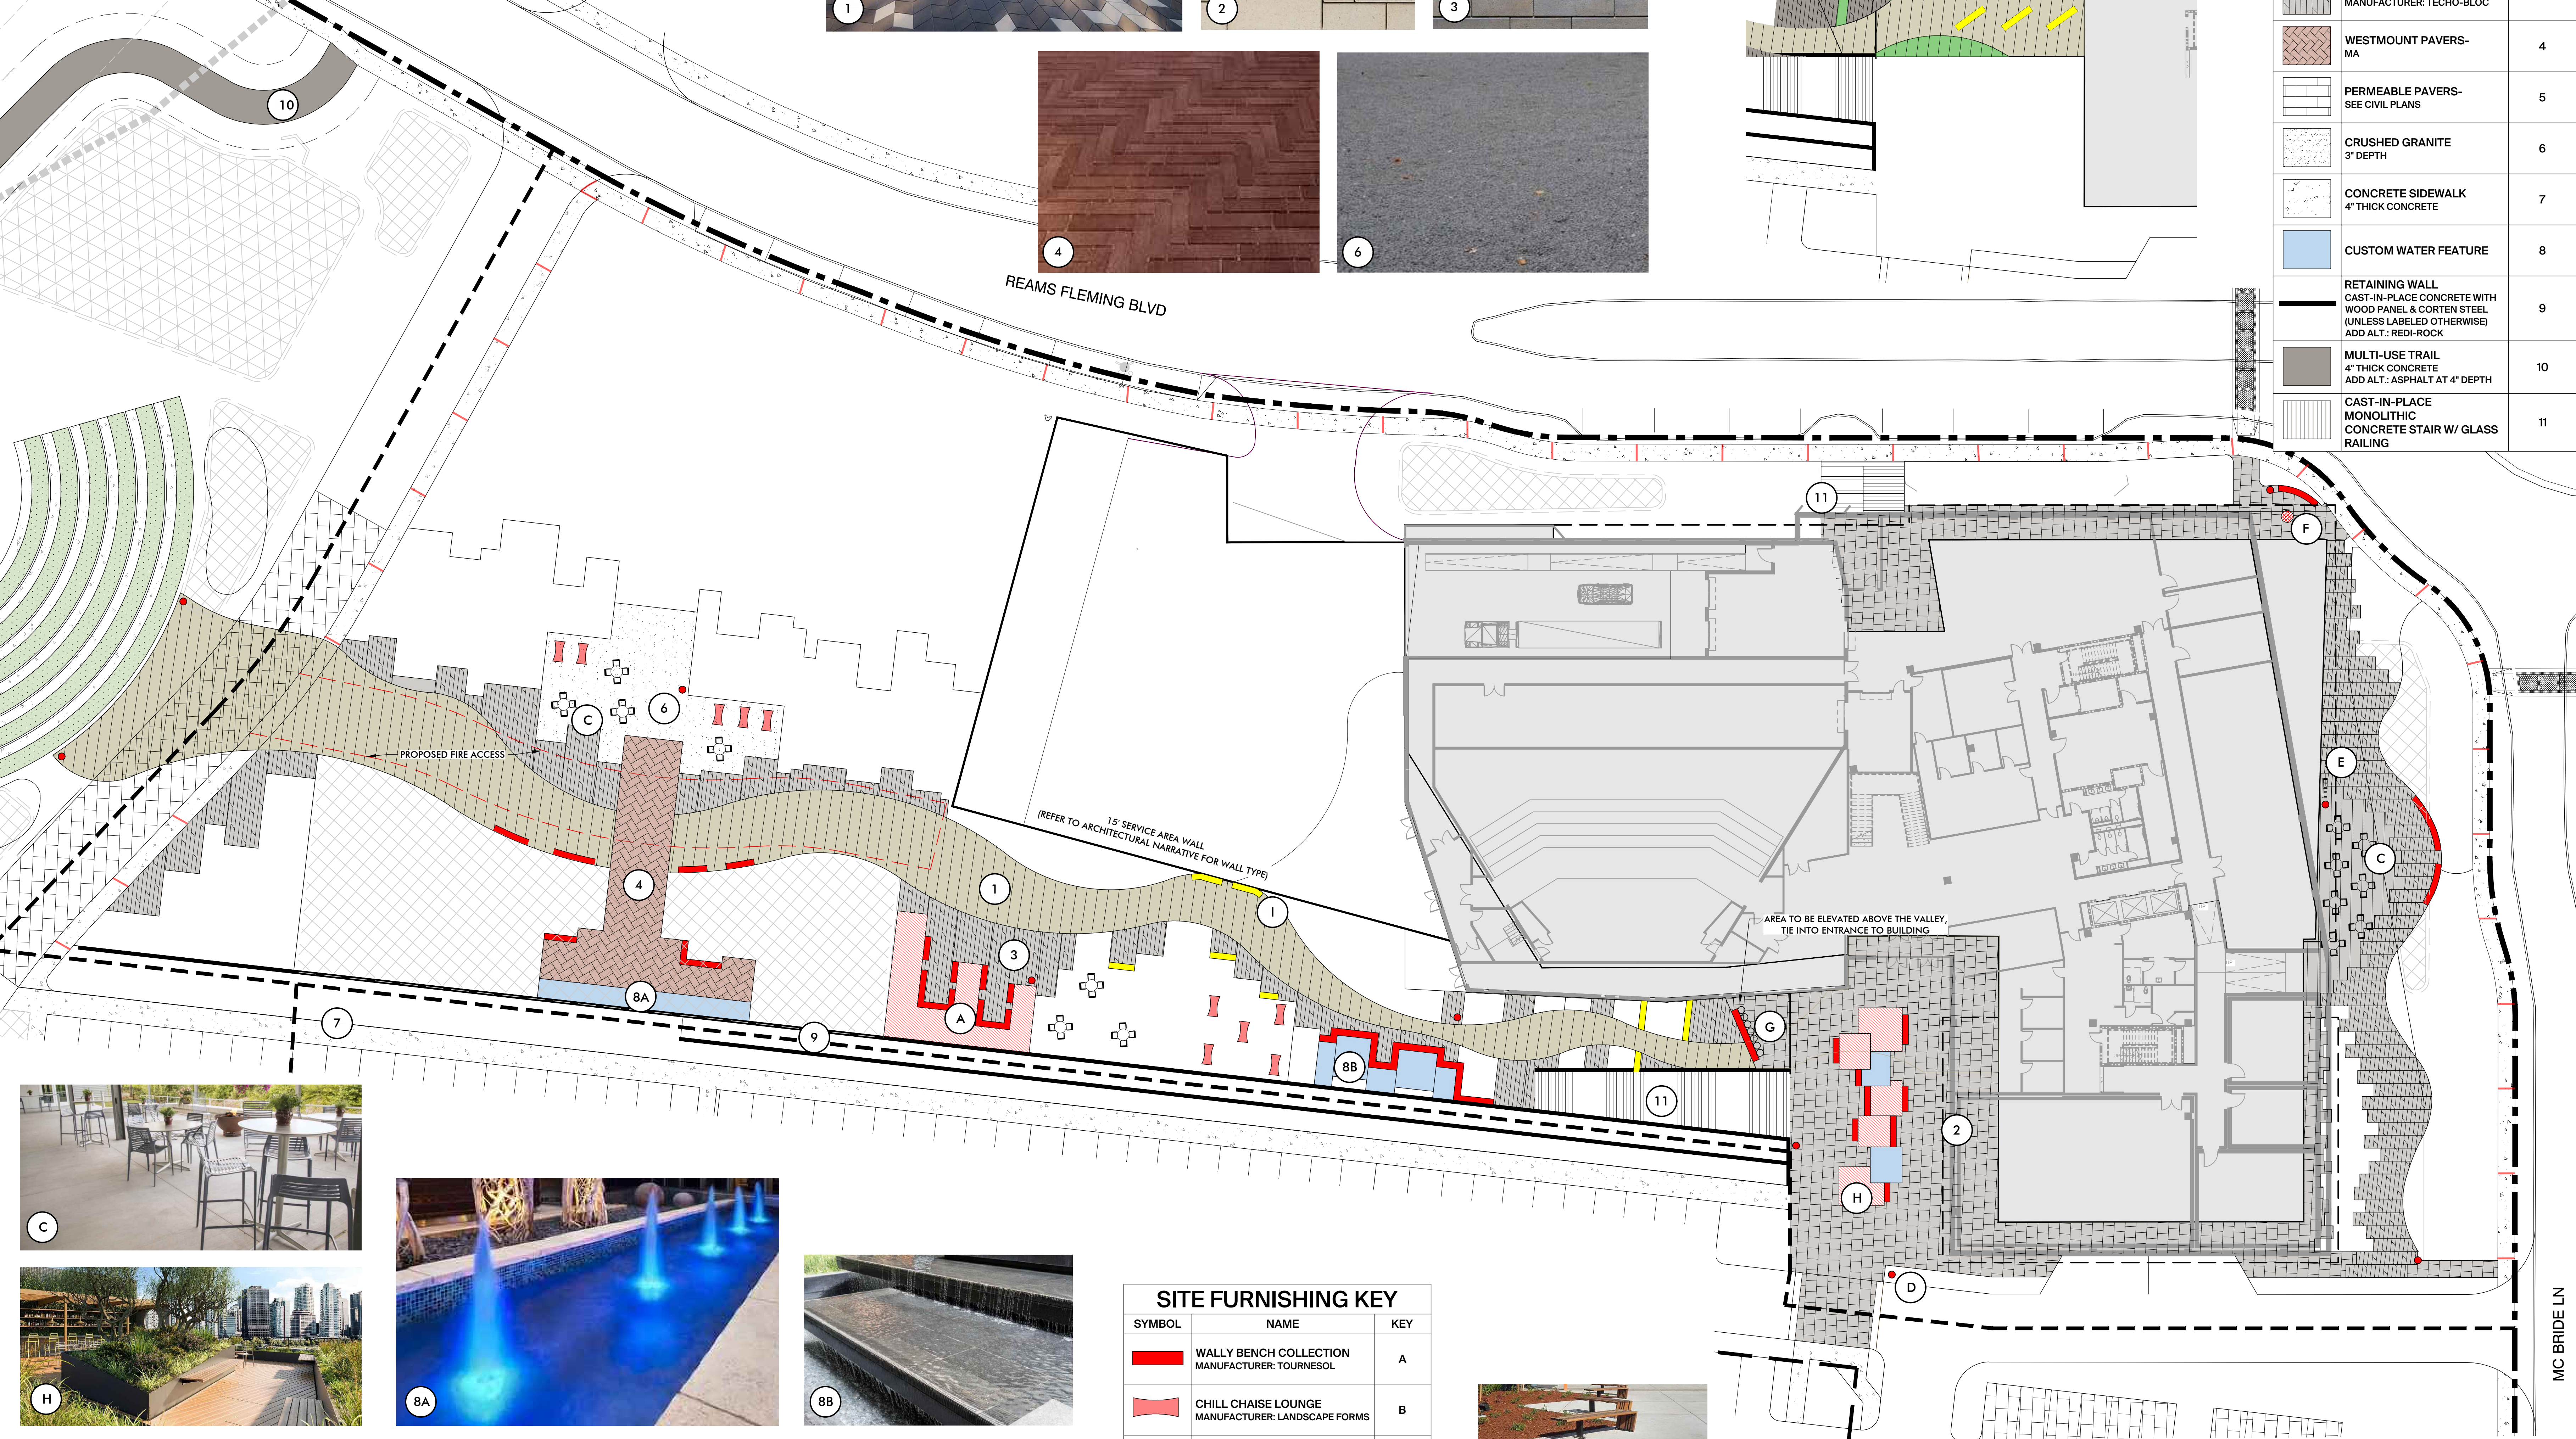

SITE FURNISHING KEY		
SYMBOL	NAME	KEY
	WALLY BENCH COLLECTION MANUFACTURER: TOURNESOL	A
	CHILL CHAISE LOUNGE MANUFACTURER: LANDSCAPE FORMS	B
	CHIPMAN TABLE AND CHAIRS MANUFACTURER: LANDSCAPE FORMS	C
	GENERATION 50 LITTER MANUFACTURER: LANDSCAPE FORMS	D
	RIDE BIKE RACK MANUFACTURER: LANDSCAPE FORMS	E
	ART SCULPTURE/ SIGNAGE: TBD	F
	JESSIE RAIL W/ CHIPMAN BAR STOOLS MANUFACTURER: LANDSCAPE FORMS	G
	KITSAP MODULAR METAL PLANTER WALLS MANUFACTURER: TOURNESOL	H
	STRAND BENCH COLLECTION MANUFACTURER: TOURNESOL	I

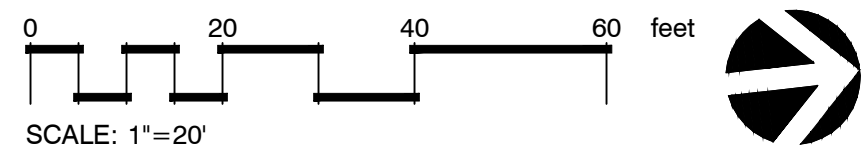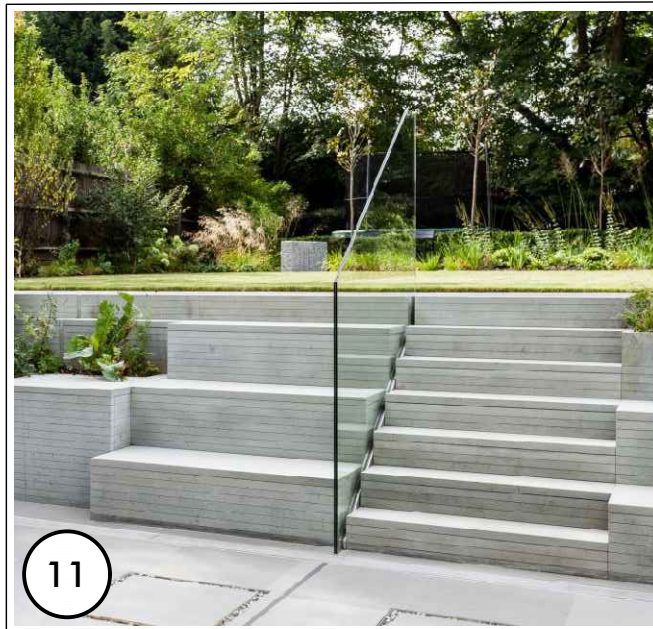


REVISION INFORMATION

PROJECT # 21045
ISSUE DATE 2021.10.29

ENLARGED
MATERIALS PLAN

L11

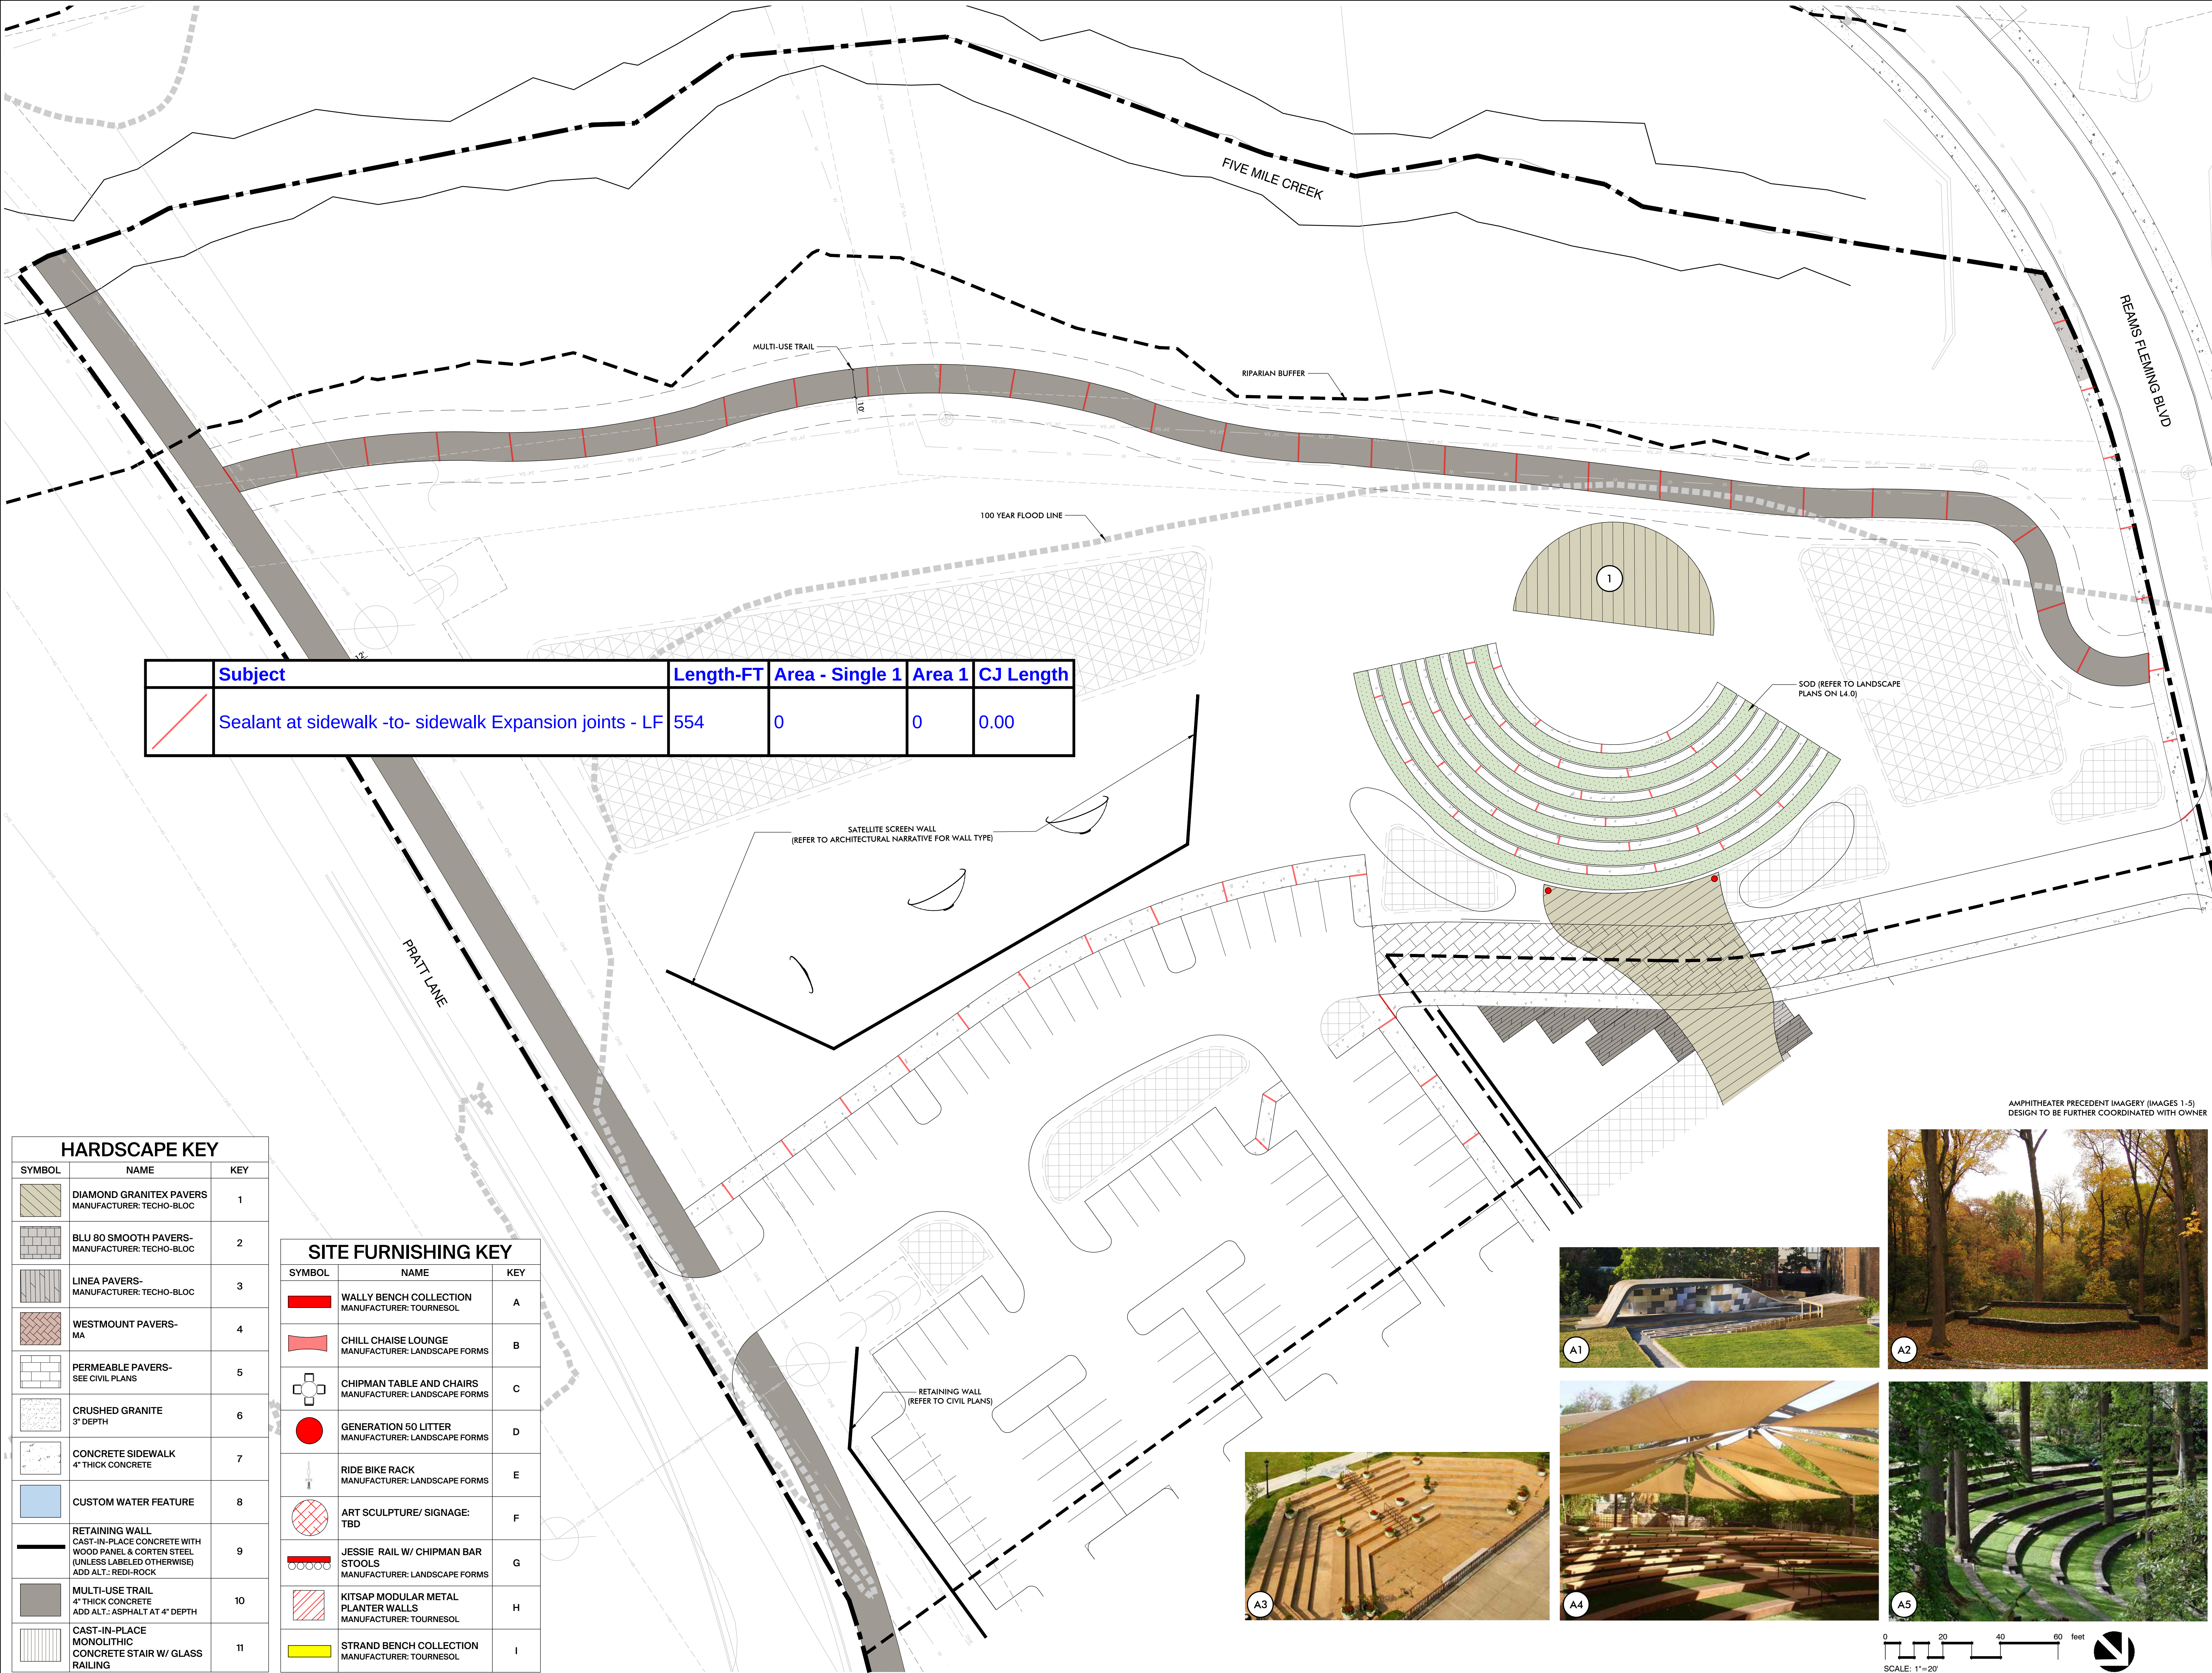

HARDSCAPE KEY		
SYMBOL	NAME	KEY
	DIAMOND GRANITEX PAVERS MANUFACTURER: TECO-BLOC	1
	BLU 80 SMOOTH PAVERS- MANUFACTURER: TECO-BLOC	2
	LINEA PAVERS- MANUFACTURER: TECO-BLOC	3
	WESTMOUNT PAVERS- MA	4
	PERMEABLE PAVERS- SEE CIVIL PLANS	5
	CRUSHED GRANITE 3" DEPTH	6
	CONCRETE SIDEWALK 4" THICK CONCRETE	7
	CUSTOM WATER FEATURE	8
	RETAINING WALL CAST-IN-PLACE CONCRETE WITH WOOD PANEL & CORTEN STEEL (UNLESS LABELED OTHERWISE) ADD ALT.: REDI-ROCK	9
	MULTI-USE TRAIL 4" THICK CONCRETE ADD ALT.: ASPHALT AT 4" DEPTH	10
	CAST-IN-PLACE MONOLITHIC CONCRETE STAIR W/ GLASS RAILING	11

SITE FURNISHING KEY		
SYMBOL	NAME	KEY
	WALLY BENCH COLLECTION MANUFACTURER: TOURNESOL	A
	CHILL CHAISE LOUNGE MANUFACTURER: LANDSCAPE FORMS	B
	CHIPMAN TABLE AND CHAIRS MANUFACTURER: LANDSCAPE FORMS	C
	GENERATION 50 LITTER MANUFACTURER: LANDSCAPE FORMS	D
	RIDE BIKE RACK MANUFACTURER: LANDSCAPE FORMS	E
	ART SCULPTURE/ SIGNAGE: TBD	F
	JESSIE RAIL W/ CHIPMAN BAR STOOLS MANUFACTURER: LANDSCAPE FORMS	G
	KITSAP MODULAR METAL PLANTER WALLS MANUFACTURER: TOURNESOL	H
	STRAND BENCH COLLECTION MANUFACTURER: TOURNESOL	I

AMPHITHEATER PRECEDENT IMAGERY (IMAGES 1 -5)
DESIGN TO BE FURTHER COORDINATED WITH OWNER

REVISION INFORMATION	
PROJECT #	21045
ISSUE DATE	2021.10.29
ENLARGED MATERIALS PLAN	

PLAN NOTES

- SEE G0.03 FOR ACCESSIBILITY REQUIREMENT STANDARDS. CONTACT ARCHITECT FOR DIRECTION IF ANY FIELD CONDITIONS CONFLICT WITH THESE REQUIREMENTS.
- REFER TO DOOR SCHEDULE FOR DOORS AND HARDWARE. PROVIDE STOPS AT ALL DOOR LOCATIONS UON. SEE SHEET A7.00.
- SET NEW DOOR FRAMES 4" MIN FROM PERPENDICULAR WALL UON.
- LOOSE FURNITURE IS OFOI AND SHOWN FOR REFERENCE ONLY.
- COORDINATE ALL IN-WALL PLUMBING REQUIREMENTS WITH PLUMBING DRAWINGS PRIOR TO FRAMING. NOTIFY ARCHITECT IN WRITING OF ANY CONFLICTS.
- DIMENSIONS ARE TO FACE OF GYP BD UON. DIMENSIONS IDENTIFIED AS "CLEAR" MUST BE MAINTAINED. NOTIFY ARCHITECT IN WRITING OF ANY CONFLICTS.
- ALL KITCHEN AND MPE EQUIPMENT SHOWN FOR REFERENCE ONLY IN ARCHITECTURAL PLANS. COORDINATE ALL EQUIPMENT WITH CONSULTANT DRAWINGS. NOTIFY ARCHITECT IN WRITING OF ANY CONFLICTS.
- INTERIOR WALLS SHALL BE PERPENDICULAR AND SHALL MEET ADJACENT WALLS AT 90 DEGREE ANGLES UON.
- ELECTRICAL BOXES SHALL BE LOCATED IN A STAGGERED MANNER FROM ROOM TO ROOM. SEE DETAIL _____
- SEE ENLARGED PLANS AND DETAILS FOR DIMENSIONS NOT INCLUDED ON THIS SHEET.
- ALL GYPSUM BOARD PARTITIONS TO BE SPACKLED TAPED AND SANDED SMOOTH WITH NO VISIBLE JOINT.
- ALL OUTSIDE CORNERS OF GYPSUM BOARD TO HAVE METAL CORNER BEADS.
- REPLACE, REPAIR, AND PATCH ALL FRAMING AND GYPSUM BOARD AT EXISTING CORE WALLS WHERE ADJACENT WALLS WERE DEMOLISHED. TRANSITION ALL NEW GYPSUM BOARD AT EXISTING WALLS TO PROVIDE A SEAMLESS APPEARANCE.
- CLEAN EXISTING MASONRY WALLS FREE OF BLEMISHES AND STAINS WHERE THOSE ARE APPARENT. VERIFY EXTENT IN FIELD WITH ARCHITECT AND OWNER PRIOR TO EXECUTION.


PLAN KEYNOTES

- ALIGN CENTER OF PARTITION WITH CENTERLINE OF MULLION. SEE DETAIL _____
- DEMOUNTABLE SLIDING DOOR AND/OR GLASS SIDELITE UNITS PROVIDED AND INSTALLED BY FURNITURE VENDOR - GC TO COORDINATE SHOWN FOR INFORMATION AND COORDINATION ONLY. GC TO PROVIDE GYP BD CASD OPENINGS _____ AFF TALL BY WIDTH INDICATED IN PLANS.
- PROVIDE CONDUIT FLOOR STUB-UP FOR POWER, CONDUIT FLOOR STUB-UP FOR A/V, AND CONDUIT FLOOR STUB-UP FOR LOW VOLTAGE REQUIREMENTS AT CONFERENCE ROOM TABLES. VERIFY EXACT LOCATION WITH OWNER AND ARCHITECT.
- PROVIDE POWER, DATA, AND BLOCKING AS REQUIRED FOR VIDEO CONFERENCING EQUIPMENT.
- CORE DRILL FOR POWER AND DATA TO CONFERENCE ROOM TABLE.
- PROVIDE POWER AND DATA FOR PRINTER.
- GRAPHICS APPLIED TO WALL - PROVIDE LEVEL 5 FINISH.
- ALIGN NEW CONSTRUCTION WITH EXISTING WALLS, COLUMNS, ETC. PROVIDE SMOOTH FINISH AT JOINTS OF SIMILAR MATERIALS SUCH THAT JOINT IS INVISIBLE.
- EXISTING 1-HR RATED WALL TO REMAIN, CONTRACTOR TO NOTIFY ARCHITECT IF EXISTING WALL IS NOT 1-HR RATED.
- CONCRETE SLAB - ISOLATED FROM ADJACENT ROOMS
- PROVIDE LEVEL 5 FINISH ON ALL GYP WALLS IN SPACES INDICATED

WALL LEGEND

- EXISTING PARTITION TO REMAIN
- UNRATED PARTITION
- SMOKE TIGHT PARTITION
- 1 HOUR PARTITION
- 2 HOUR PARTITION
- 3 HOUR PARTITION
- CMU PARTITION

SEE SHEET G0.04 FOR INTERIOR PARTITION DETAILS

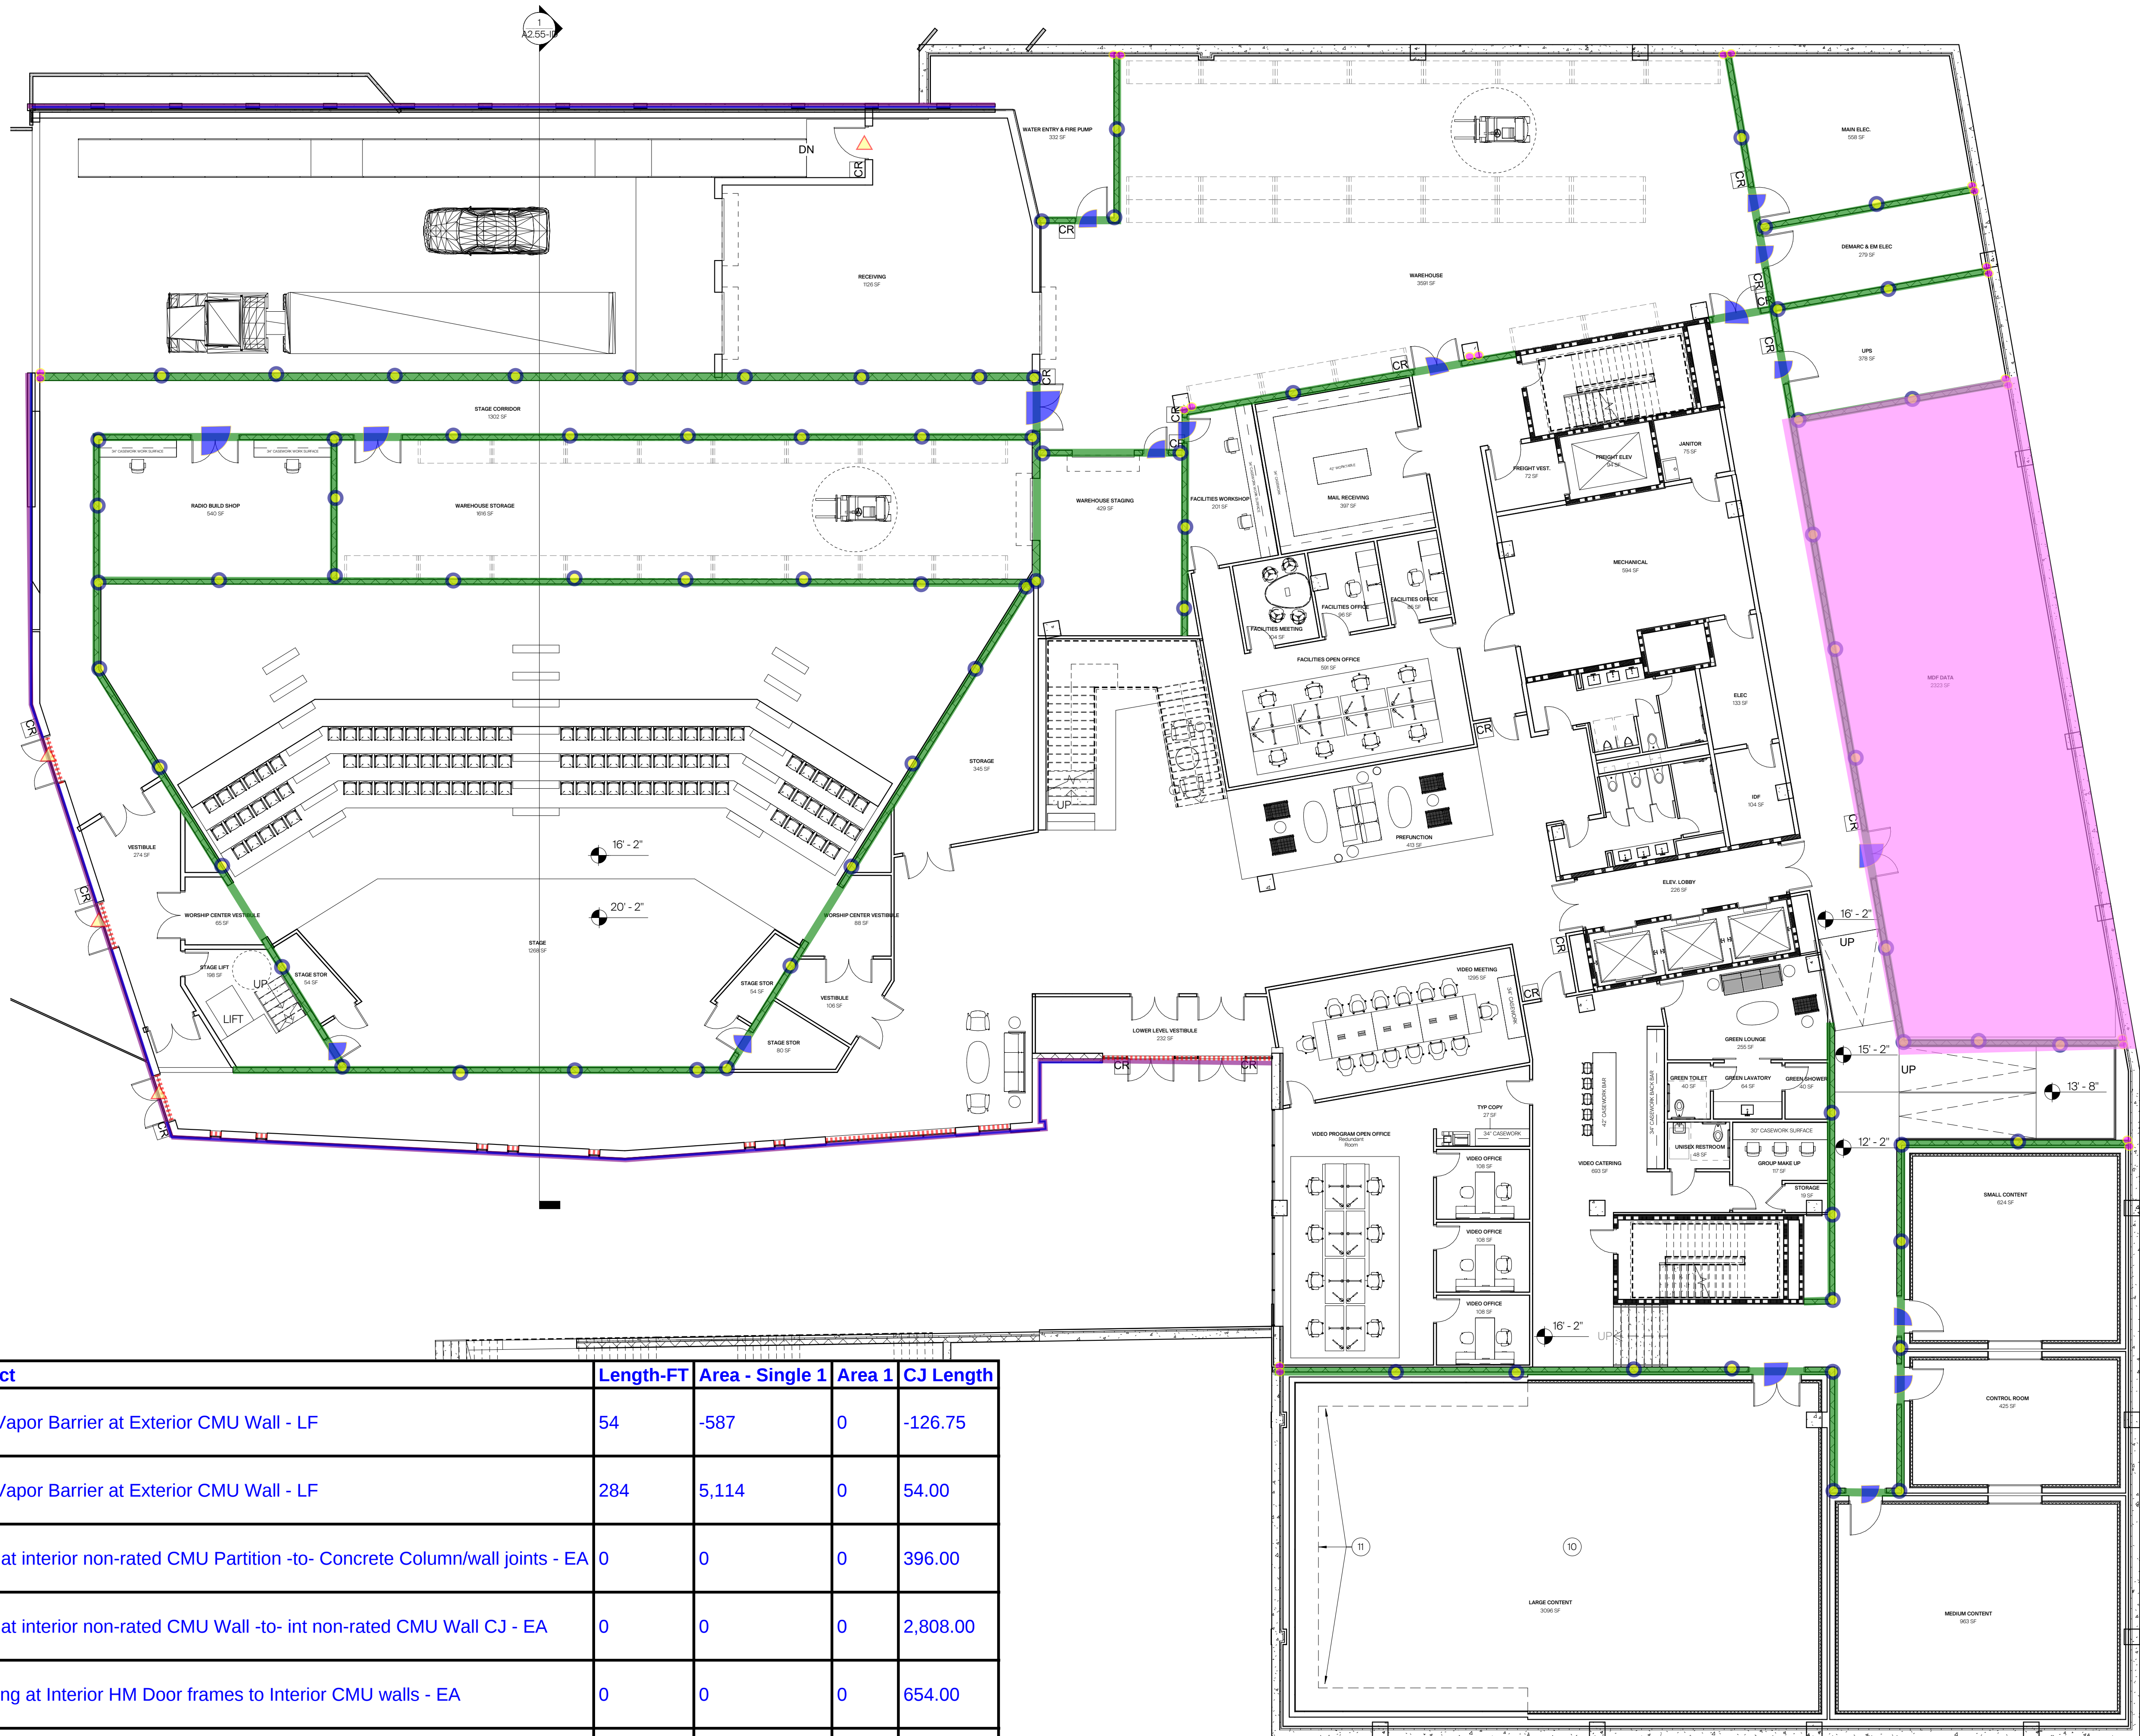

	Subject	Length-FT	Area - Single	Area 1	CJ Length
	Air & Vapor Barrier at Exterior CMU Wall - LF	54	-587	0	-126.75
	Air & Vapor Barrier at Exterior CMU Wall - LF	284	5,114	0	54.00
	Caulk at interior non-rated CMU Partition -to- Concrete Column/wall joints - EA	0	0	0	396.00
	Caulk at interior non-rated CMU Wall -to- int non-rated CMU Wall CJ - EA	0	0	0	2,808.00
	Caulking at Interior HM Door frames to Interior CMU walls - EA	0	0	0	654.00
	Caulking at top of interior non-rated CMU Walls -to- Deck (Both Sides)	1,226	0	0	0.00
	Pre-applied membrane waterproofing under slabs - Area	175	0	1,474	0.00
	Sealant at exterior HM door frame -to- exterior masonry veneer joints - Ea	0	0	0	154.00
	Transition membrane Flashing at the base of the exterior wall	253	0	0	0.00

REVISION INFORMATION

PROJECT # 21045
ISSUE DATE 2021.10.29

LOWER LEVEL FLOOR
PLAN - ID

A1.00-ID

PLAN NOTES

- SEE G0.03 FOR ACCESSIBILITY REQUIREMENT STANDARDS. CONTACT ARCHITECT FOR DIRECTION IF ANY FIELD CONDITIONS CONFLICT WITH THESE REQUIREMENTS.
- REFER TO DOOR SCHEDULE FOR DOORS AND HARDWARE. PROVIDE STOPS AT ALL DOOR LOCATIONS UON. SEE SHEET A7.00
- SET NEW DOOR FRAMES 4" MIN FROM PERPENDICULAR WALL UON.
- LOOSE FURNITURE IS DFOI AND SHOWN FOR REFERENCE ONLY.
- COORDINATE ALL IN-WALL PLUMBING REQUIREMENTS WITH PLUMBING DRAWINGS PRIOR TO FRAMING. NOTIFY ARCHITECT IN WRITING OF ANY CONFLICTS.
- DIMENSIONS ARE TO FACE OF GYP BD UON. DIMENSIONS IDENTIFIED AS "CLEAR" MUST BE MAINTAINED. NOTIFY ARCHITECT IN WRITING OF ANY CONFLICTS.
- ALL KITCHEN AND MPE EQUIPMENT SHOWN FOR REFERENCE ONLY IN ARCHITECTURAL PLANS. COORDINATE ALL EQUIPMENT WITH CONSULTANT DRAWINGS. NOTIFY ARCHITECT IN WRITING OF ANY CONFLICTS.
- INTERIOR WALLS SHALL BE PERPENDICULAR AND SHALL MEET ADJACENT WALLS AT 90 DEGREE ANGLES UON.
- ELECTRICAL BOXES SHALL BE LOCATED IN A STAGGERED MANNER FROM ROOM TO ROOM. SEE ACOUSTIC/ELEC DETAILS.
- SEE ENLARGED PLANS AND DETAILS FOR DIMENSIONS NOT INCLUDED ON THIS SHEET.
- ALL GYPSUM BOARD PARTITIONS TO BE SPACKLED TAPED AND SANDED SMOOTH WITH NO VISIBLE JOINT.
- ALL OUTSIDE CORNERS OF GYPSUM BOARD TO HAVE METAL CORNER BEADS.

PLAN KEYNOTES


- 2" EXPANSION JOINT THROUGH WALL, FLOOR, CEILING, AND ROOF ASSEMBLIES
- 8' X 10' INSULATED ROLL UP DOORS
- OWNER FURNISHED/INSTALLED SATELLITE DISHES

WALL LEGEND

- UNRATED PARTITION
 - SMOKE TIGHT PARTITION
 - 1 HOUR PARTITION
 - 2 HOUR PARTITION
 - CMU PARTITION
- SEE SHEET G0.04 FOR INTERIOR PARTITION DETAILS

EXTERIOR ASSEMBLIES LEGEND

- EW-1 PRECAST CONCRETE - SEE G0.06
- EW-1B METAL FRAMING WITH STONE VENEER - SEE G0.06
- EW-2 METAL STUD FRAMING WITH ACM PANEL - SEE G0.06
- EW-3 METAL STUD FRAMING WITH ACM PANEL - SEE G0.06
- EW-2B METAL STUD FRAMING WITH ACM PANEL (ALT) - SEE G0.06
- EW-4 TUBE STEEL WITH METAL SCREEN - SEE G0.06
- EW-5 CONCRETE WITH STONE VENEER - SEE G0.06
- EW-5a INSULATED PRECAST PANEL - SEE G0.06
- EW-6 CONCRETE FOUNDATION STEM WALL - SEE G0.07
- EW-7 CONCRETE RETAINING WALL - SEE G0.07
- EW-8 CONCRETE EXPOSED RETAINING WALL - SEE G0.07
- EW-9 SSG CURTAIN WALL - SEE G0.07
- EW-10 SSG CURTAIN WALL SPANDREL - SEE G0.07
- EW-11 FRONT SET STOREFRONT - SEE G0.07
- SA-1 ACM SOFFIT ASSEMBLY - SEE G0.06
- SA-1a FIBROUS PANEL SOFFIT - SEE G0.06
- RF-1 PAVERS OVER CONCRETE - SEE G0.08
- RF-2 PAVERS ON INSULATION OVER CONCRETE - SEE G0.08
- RF-3 TRAYS OVER CONCRETE - SEE G0.08
- RF-4 POLYISO ON CONCRETE - SEE G0.08
- RF-5 POLYISO ON METAL DECK WITH SPMI - SEE G0.08
- RF-6 POLYISO ON CONCRETE WITH BALLAST - SEE G0.08
- RF-7 POLYISO ON DECK WITH BALLAST - SEE G0.08
- R2-2 CIP CONCRETE ON GRADE - SEE G0.08

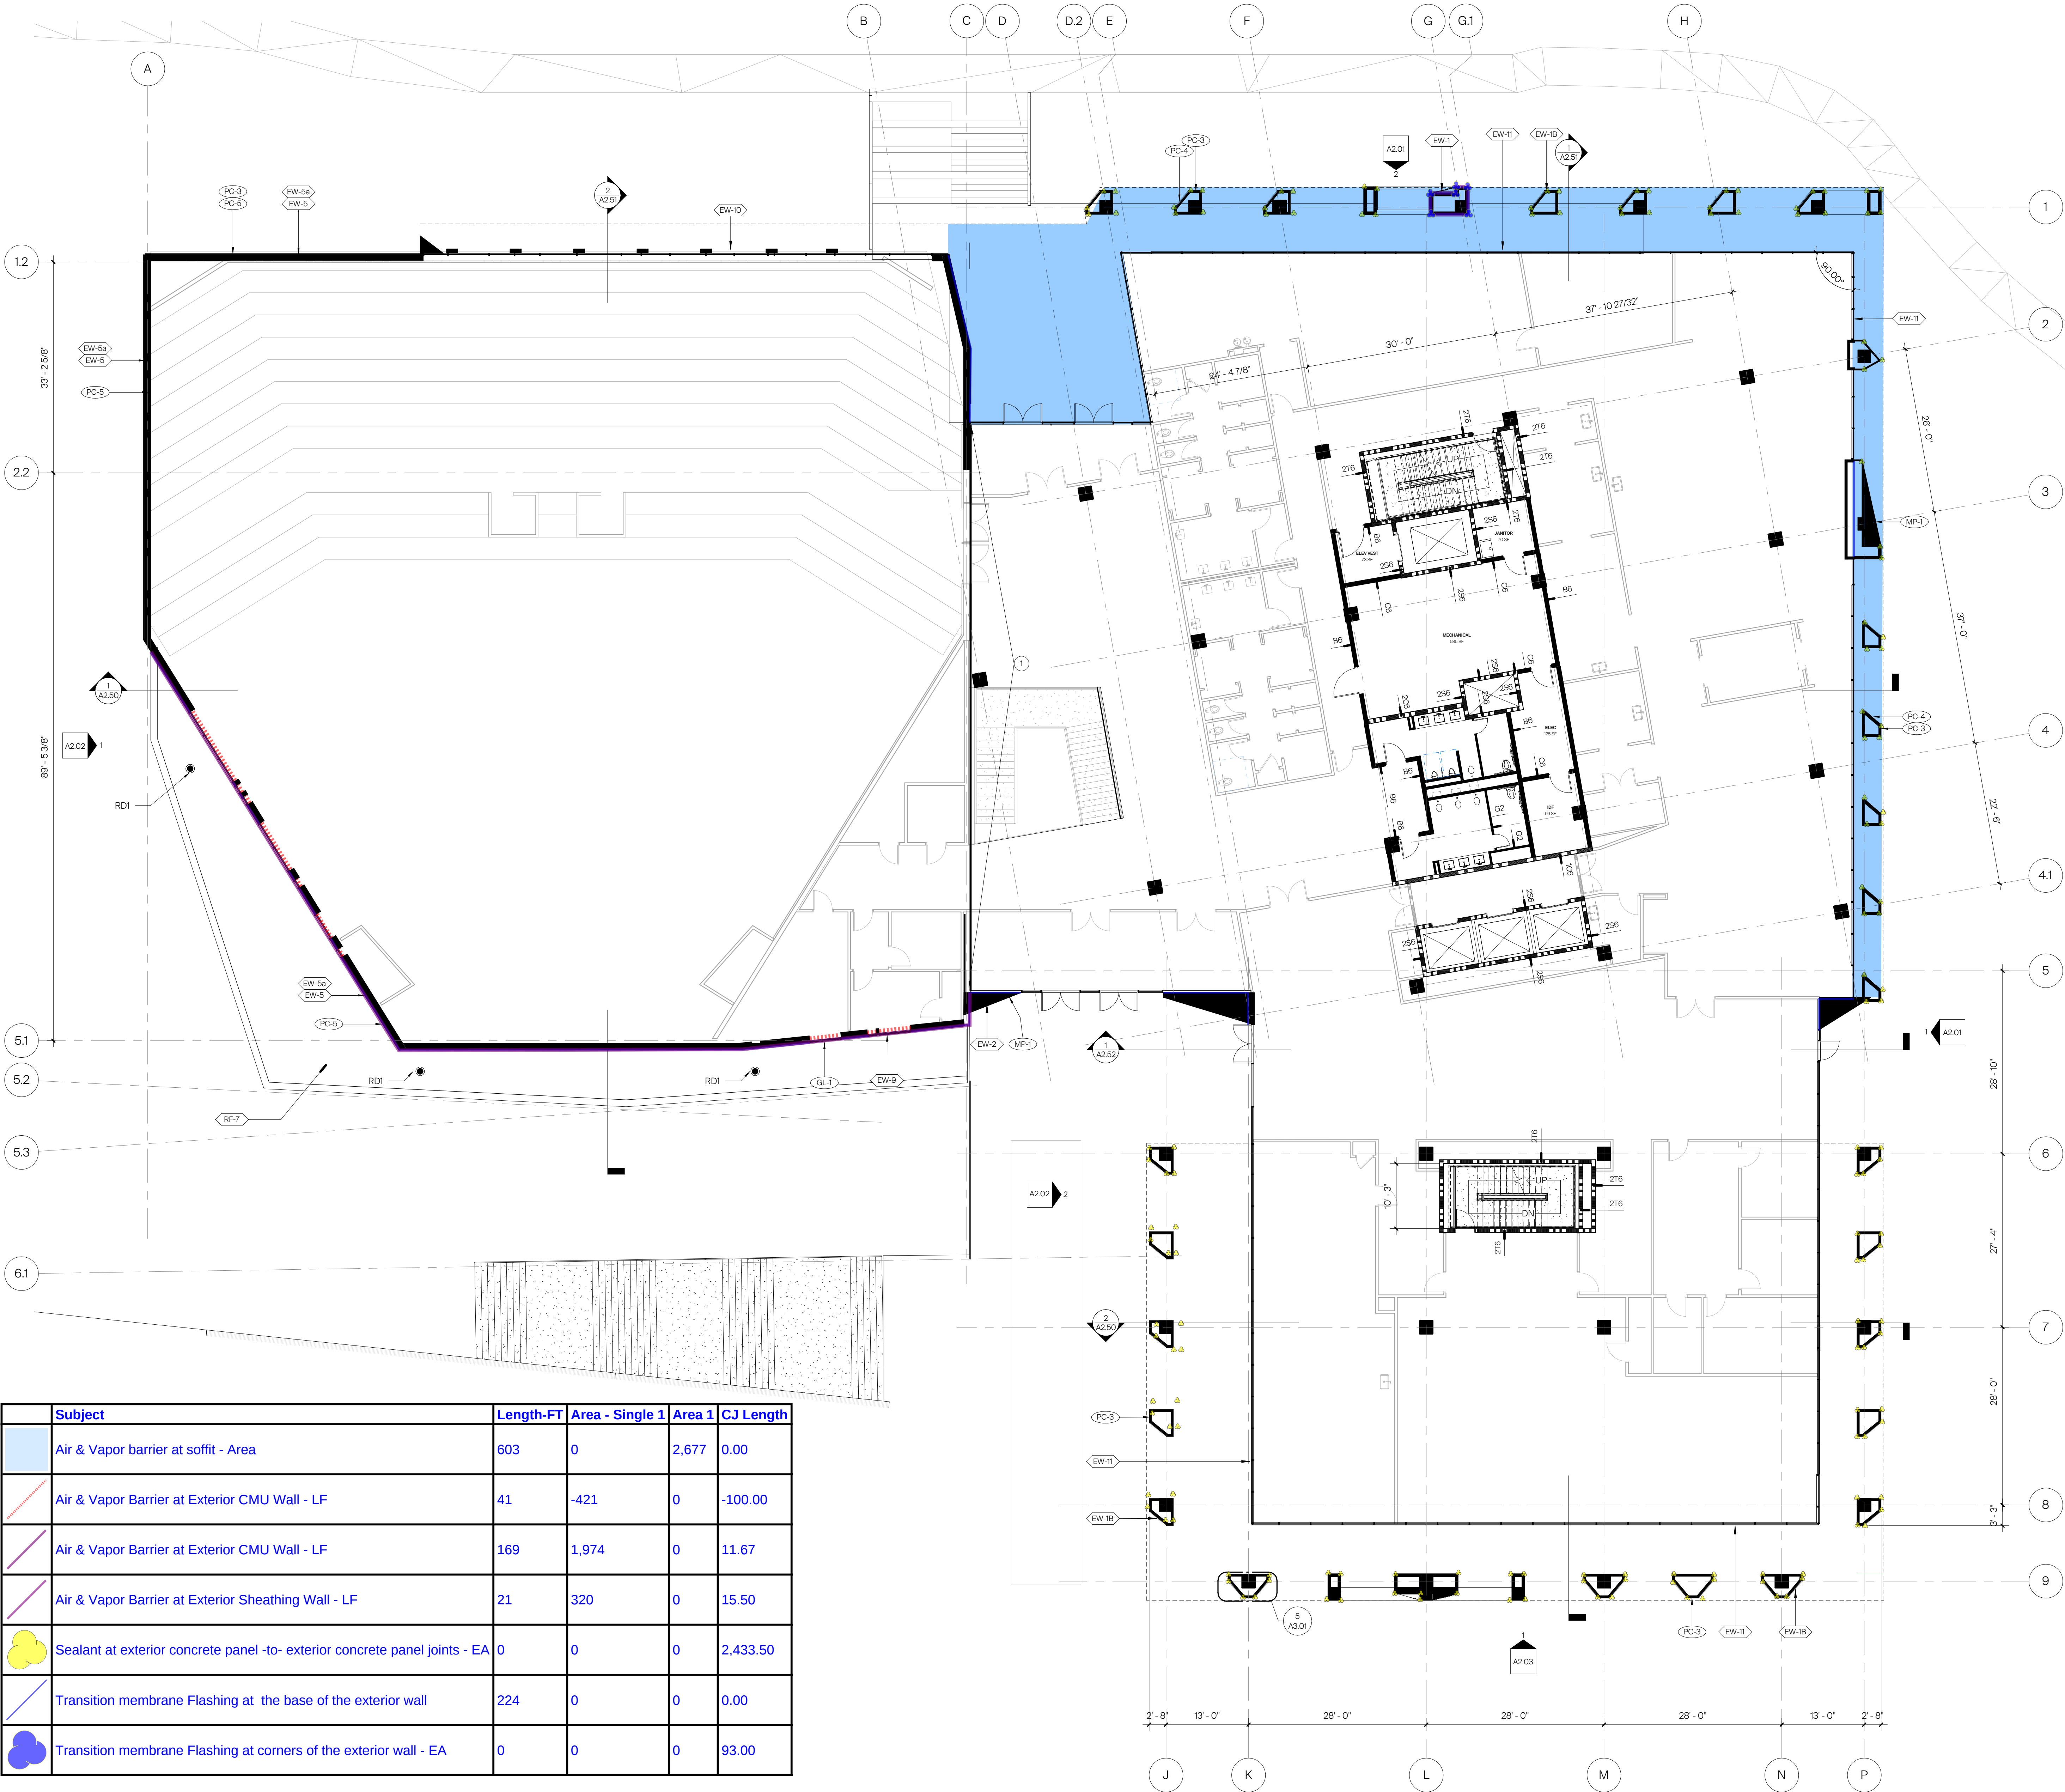

	Subject	Length-FT	Area - Single 1	Area 1	CJ Length
	Air & Vapor barrier at soffit - Area	603	0	2,677	0.00
	Air & Vapor Barrier at Exterior CMU Wall - LF	41	-421	0	-100.00
	Air & Vapor Barrier at Exterior CMU Wall - LF	169	1,974	0	11.67
	Air & Vapor Barrier at Exterior Sheathing Wall - LF	21	320	0	15.50
	Sealant at exterior concrete panel -to- exterior concrete panel joints - EA	0	0	0	2,433.50
	Transition membrane Flashing at the base of the exterior wall	224	0	0	0.00
	Transition membrane Flashing at corners of the exterior wall - EA	0	0	0	93.00

REVISION INFORMATION

PROJECT # 21045
ISSUE DATE 2021.10.29

FIRST FLOOR PLAN

A1.01

PLAN NOTES

- SEE G0.03 FOR ACCESSIBILITY REQUIREMENT STANDARDS. CONTACT ARCHITECT FOR DIRECTION IF ANY FIELD CONDITIONS CONFLICT WITH THESE REQUIREMENTS.
- REFER TO DOOR SCHEDULE FOR DOORS AND HARDWARE. PROVIDE STOPS AT ALL DOOR LOCATIONS UON. SEE SHEET A7.00.
- SET NEW DOOR FRAMES 4" MIN FROM PERPENDICULAR WALL UON.
- LOOSE FURNITURE IS OFOI AND SHOWN FOR REFERENCE ONLY.
- COORDINATE ALL IN-WALL PLUMBING REQUIREMENTS WITH PLUMBING DRAWINGS PRIOR TO FRAMING. NOTIFY ARCHITECT IN WRITING OF ANY CONFLICTS.
- DIMENSIONS ARE TO FACE OF GYP BD UON. DIMENSIONS IDENTIFIED AS "CLEAR" MUST BE MAINTAINED. NOTIFY ARCHITECT IN WRITING OF ANY CONFLICTS.
- ALL KITCHEN AND MPE EQUIPMENT SHOWN FOR REFERENCE ONLY IN ARCHITECTURAL PLANS. COORDINATE ALL EQUIPMENT WITH CONSULTANT DRAWINGS. NOTIFY ARCHITECT IN WRITING OF ANY CONFLICTS.
- INTERIOR WALLS SHALL BE PERPENDICULAR AND SHALL MEET ADJACENT WALLS AT 90 DEGREE ANGLES UON.
- ELECTRICAL BOXES SHALL BE LOCATED IN A STAGGERED MANNER FROM ROOM TO ROOM. SEE ACOUSTIC/ELEC DETAILS.
- SEE ENLARGED PLANS AND DETAILS FOR DIMENSIONS NOT INCLUDED ON THIS SHEET.
- ALL GYPSUM BOARD PARTITIONS TO BE SPACKLED TAPED AND SANDED SMOOTH WITH NO VISIBLE JOINT.
- ALL OUTSIDE CORNERS OF GYPSUM BOARD TO HAVE METAL CORNER BEADS.

PLAN KEYNOTES

- 2" EXPANSION JOINT THROUGH WALL, FLOOR, CEILING, AND ROOF ASSEMBLIES
- 8' X 10' INSULATED ROLL UP DOORS
- OWNER FURNISHED/INSTALLED SATELLITE DISHES

WALL LEGEND


- UNRATED PARTITION
- SMOKE TIGHT PARTITION
- 1 HOUR PARTITION
- 2 HOUR PARTITION
- CMU PARTITION

SEE SHEET G0.04 FOR INTERIOR PARTITION DETAILS

EXTERIOR ASSEMBLIES LEGEND

- EW-1 PRECAST CONCRETE - SEE G0.06
- EW-1B METAL FRAMING WITH STONE VENEER - SEE G0.06
- EW-2 METAL STUD FRAMING WITH ACM PANEL - SEE G0.06
- EW-3 METAL STUD FRAMING WITH ACM PANEL - SEE G0.06
- EW-2a METAL STUD FRAMING WITH ACM PANEL (ALT) - SEE G0.06
- EW-4 TUBE STEEL WITH METAL SCREEN - SEE G0.06
- EW-5 CONCRETE WITH STONE VENEER - SEE G0.06
- EW-5a INSULATED PRECAST PANEL - SEE G0.06
- EW-6 CONCRETE FOUNDATION STEM WALL - SEE G0.07
- EW-7 CONCRETE RETAINING WALL - SEE G0.07
- EW-8 CONCRETE EXPOSED RETAINING WALL - SEE G0.07
- EW-9 SSG CURTAIN WALL - SEE G0.07
- EW-10 SSG CURTAIN WALL SPANDREL - SEE G0.07
- EW-11 FRONT SET STOREFRONT - SEE G0.07
- SA-1 ACM SOFFIT ASSEMBLY - SEE G0.06
- SA-1a FIBROUS PANEL SOFFIT - SEE G0.06
- RF-1 PAVERS OVER CONCRETE - SEE G0.08
- RF-2 PAVERS ON INSULATION OVER CONCRETE - SEE G0.08
- RF-3 TRAYS OVER CONCRETE - SEE G0.08
- RF-4 POLYISO ON CONCRETE - SEE G0.08
- RF-5 POLYISO ON METAL DECK WITH SPMI - SEE G0.08
- RF-6 POLYISO ON CONCRETE WITH BALLAST - SEE G0.08
- RF-7 POLYISO ON DECK WITH BALLAST - SEE G0.08
- P2-2 CIP CONCRETE ON GRADE - SEE G0.08

	Subject	Length-FT	Area - Single 1	Area 1	CJ Length
	Hot-applied waterproofing at deck - Area	747	0	15,869	0.00
	Hot-applied waterproofing details at corners + Termination Bar - LF	644	0	0	0.00
	Length Measurement	23	0	0	0.00
	Sealant at exterior parapet cap -to- exterior masonry veneer joints - LF	906	0	0	0.00

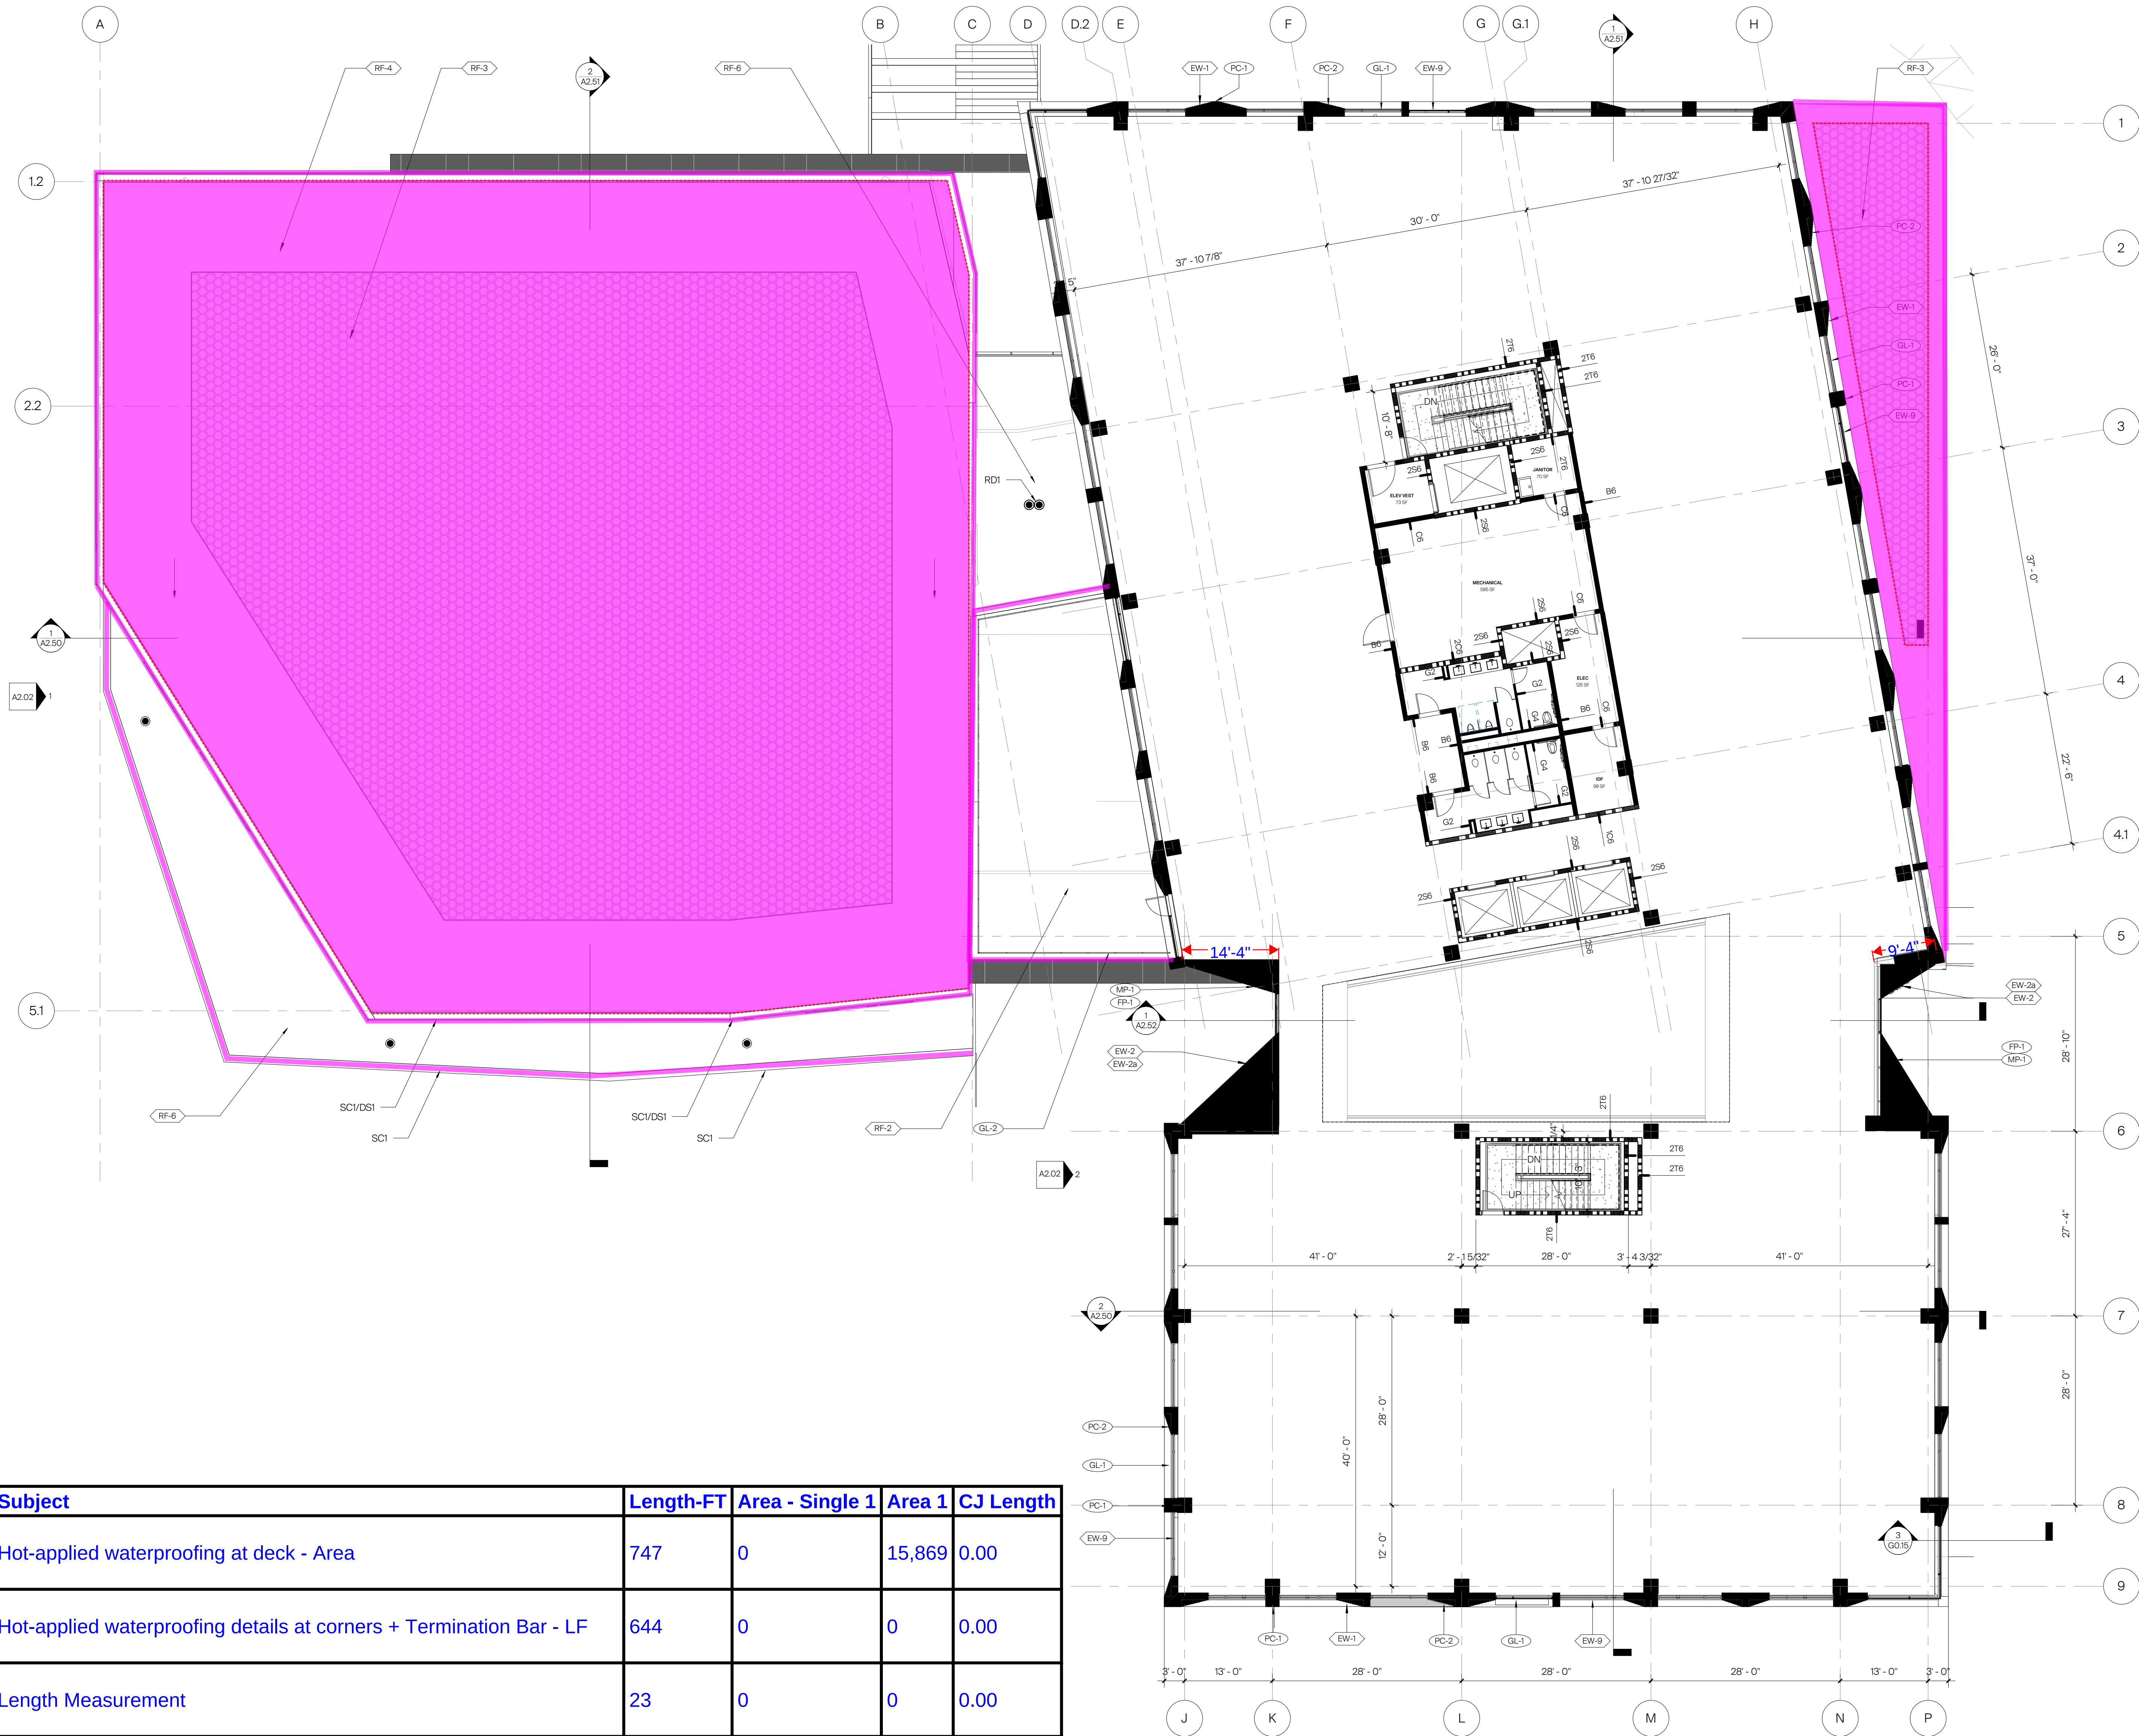

1 O2 SECOND LEVEL
3/32" = 1'-0"

REVISION INFORMATION

PROJECT # 21045
ISSUE DATE 2021.10.29

SECOND FLOOR PLAN

A1.02

EXTERIOR MATERIALS LEGEND

- GL-1 1" INSULATED LOW-E VISION GLASS - BASIS OF DESIGN VIRAÇON VREI-4322
- SP-1 1" INSULATED LOW-E SPANDREL GLASS - BASIS OF DESIGN VIRAÇON VREI-4322
- HW-1 OLDCASTLE BUILDING ENVELOPE SIGNATURE SERIES SIGHT WINDOW WALL OR APPROVED EQUAL - BLACK ANODIZED
- WW-2 ACURITE SINGLE PITCH SKYLIGHT - CLEAR ANODIZED (U VALUE 0.50 MAX, SHGC 0.40 MAX)
- PC-1 TRADITIONAL PRECAST PANEL WITH LIGHT CONCRETE AND A HONED FINISH-BASIS OF DESIGN GATE PRECAST CUSTOM MIX
- PC-2 TRADITIONAL PRECAST PANEL WITH LIGHT CONCRETE AND A ACID ETCH FINISH-BASIS OF DESIGN GATE PRECAST CUSTOM MIX
- PC-3 DEX PRECAST PANEL WITH DARK CONCRETE AND A HONED FINISH-BASIS OF DESIGN GATE PRECAST CUSTOM MIX
- PC-4 DEX PRECAST PANEL WITH DARK CONCRETE AND A ACID ETCH FINISH-BASIS OF DESIGN GATE PRECAST CUSTOM MIX
- PC-5 TRADITIONAL PRECAST PANEL WITH DARK CONCRETE AND A HONED FINISH-BASIS OF DESIGN GATE PRECAST CUSTOM MIX
- FP-1 FIBROUS PANEL W/ CONCEALED FASTENERS - BASIS OF DESIGN FUNDERMAX XL
- GL-2 GLASS RAIL - BASIS OF DESIGN TREX COMMERCIAL TRACK RAIL SYSTEM
- MP-1 ALUMINUM COMPOSITE METAL PANEL SYSTEM WITH MATCHING COPING (ALTERNATE)
- MP-2 MORIN CORRUGATED METAL PANEL SYSTEM - EXPOSED FASTENER - BR7-35 - COLOR TBD
- MG-1 ALUMINUM CANTILEVERED GATE. AMERICA'S GATE HARDWARE W/ PALM SHIELD SOLID METAL PANEL INFILL. 24" OPENING WIDTH X 12" TALL

ROOFING MATERIALS LEGEND

- RW1 ROOF WALKWAY PROTECTION, 125 MIL TPO, EXTRUDED AND EMBOSSED TEXTURE. INSTALL WALKWAY PROTECTION AT ALL ROOF ACCESS POINTS, DOORS, LADDERS, ROOF HATCHES, SPLASH BLOCKS, ETC. (TYP)
- RDI DUAL ROOF DRAIN OVERFLOW ROUTED TO DAYLIGHT
- DSI CLOSED-FACE PREFINISHED METAL DOWNSPOUT, COLOR TO MATCH PC3. WHERE GUTTERS EXTEND TO FINISHED GRADE, CONNECT TO UNDERGROUND STORMWATER SYSTEM. WHERE DOWNSPOUTS DISCHARGE TO LOWER ROOF SURFACES, PROVIDE RPI
- SCI PREFINISHED METAL THROUGH-WALL SCUPPER - COLOR TO MATCH PC3.

DELEGATED DESIGN NOTE


SAFETY TIE-BACK ANCHORS AT ALL ROOFS SHALL BE A DELEGATED DESIGN SERVICE BY THE GC. ALL LOCATIONS, QUANTITIES AND CONNECTIONS SHALL BE ARRANGED, ENGINEERED, AND DETAILED BY A LICENSED STRUCTURAL ENGINEER TO MEET ALL APPLICABLE CODES (OSHA, ANSI, ETC) AS WELL AS REQUIRED STATIC AND ULTIMATE FORCE LOADS. PRIOR TO CONSTRUCTION, MANUFACTURER SHALL SUBMIT PRELIMINARY LAYOUT AND DETAILS FOR ARCHITECTS' INITIAL REVIEW AND COORDINATION WITH OTHER ROOFING ELEMENTS. DETAILS FOR WATERPROOFING AT ALL TIE-BACK ROOF PENETRATIONS SHALL BE REVIEWED AT THE PRE-INSTALLATION CONFERENCES PRIOR TO THE CONSTRUCTION OF THE MAIN MOCKUP INDICATED IN THE DRAWINGS.

ELEVATION GENERAL NOTES

- EJ - MASONRY EXPANSION JOINT
- FOR WINDOW ELEVATIONS SEE SHEET A7.5

EXTERIOR ASSEMBLIES LEGEND


- EW-1 PRECAST CONCRETE - SEE G0.06
- EW-1B METAL FRAMING WITH STONE VENEER - SEE G0.06
- EW-2 METAL STUD FRAMING WITH ACM PANEL - SEE G0.06
- EW-3 METAL STUD FRAMING WITH ACM PANEL - SEE G0.06
- EW-2B METAL STUD FRAMING WITH ACM PANEL (ALT) - SEE G0.06
- EW-4 TUBE STEEL WITH METAL SCREEN - SEE G0.06
- EW-5 CONCRETE WITH STONE VENEER - SEE G0.06
- EW-5a INSULATED PRECAST PANEL - SEE G0.06
- EW-6 CONCRETE FOUNDATION STEM WALL - SEE G0.07
- EW-7 CONCRETE RETAINING WALL - SEE G0.07
- EW-8 CONCRETE EXPOSED RETAINING WALL - SEE G0.07
- EW-9 SSG CURTAIN WALL - SEE G0.07
- EW-10 SSG CURTAIN WALL SPANDREL - SEE G0.07
- EW-11 FRONT SET STOREFRONT - SEE G0.07
- SA-1 ACM SOFFIT ASSEMBLY - SEE G0.06
- SA-1B FIBROUS PANEL SOFFIT - SEE G0.06
- RF-1 PAVERS OVER CONCRETE - SEE G0.08
- RF-2 PAVERS ON INSULATION OVER CONCRETE - SEE G0.08
- RF-3 TRAYS OVER CONCRETE - SEE G0.08
- RF-4 POLYISO ON CONCRETE - SEE G0.08
- RF-5 POLYISO ON METAL DECK WITH SPM - SEE G0.08
- RF-6 POLYISO ON CONCRETE WITH BALLAST - SEE G0.08
- RF-7 POLYISO ON DECK WITH BALLAST - SEE G0.08
- PZ-2 CIP CONCRETE ON GRADE - SEE G0.08

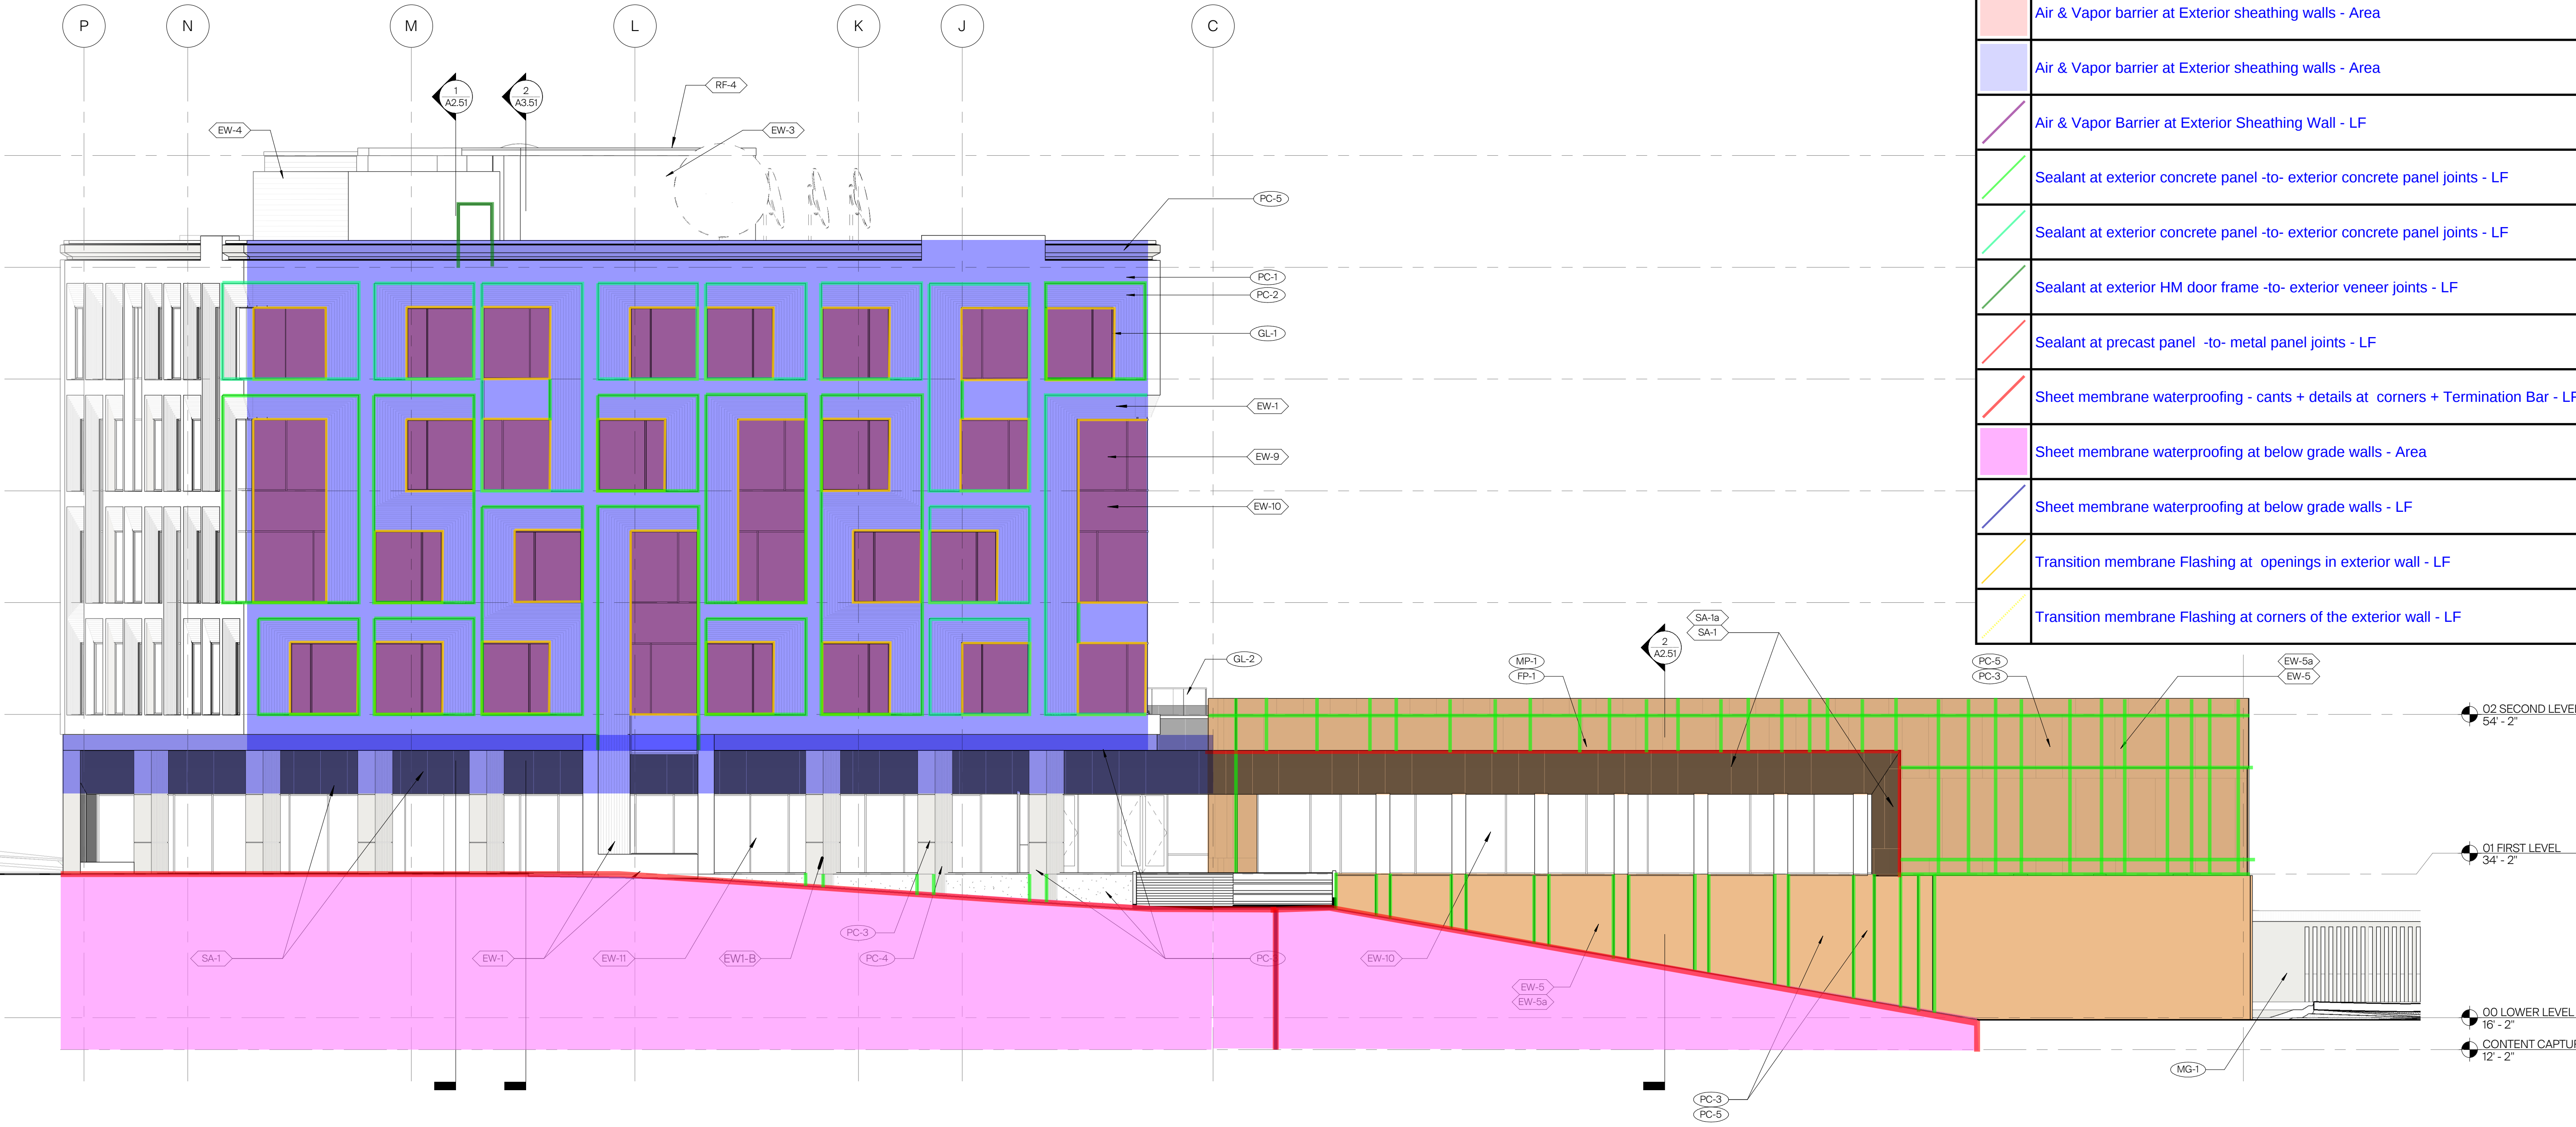

2 WEST ELEVATION

3/32" = 1'-0"

0 4' 8' 16'

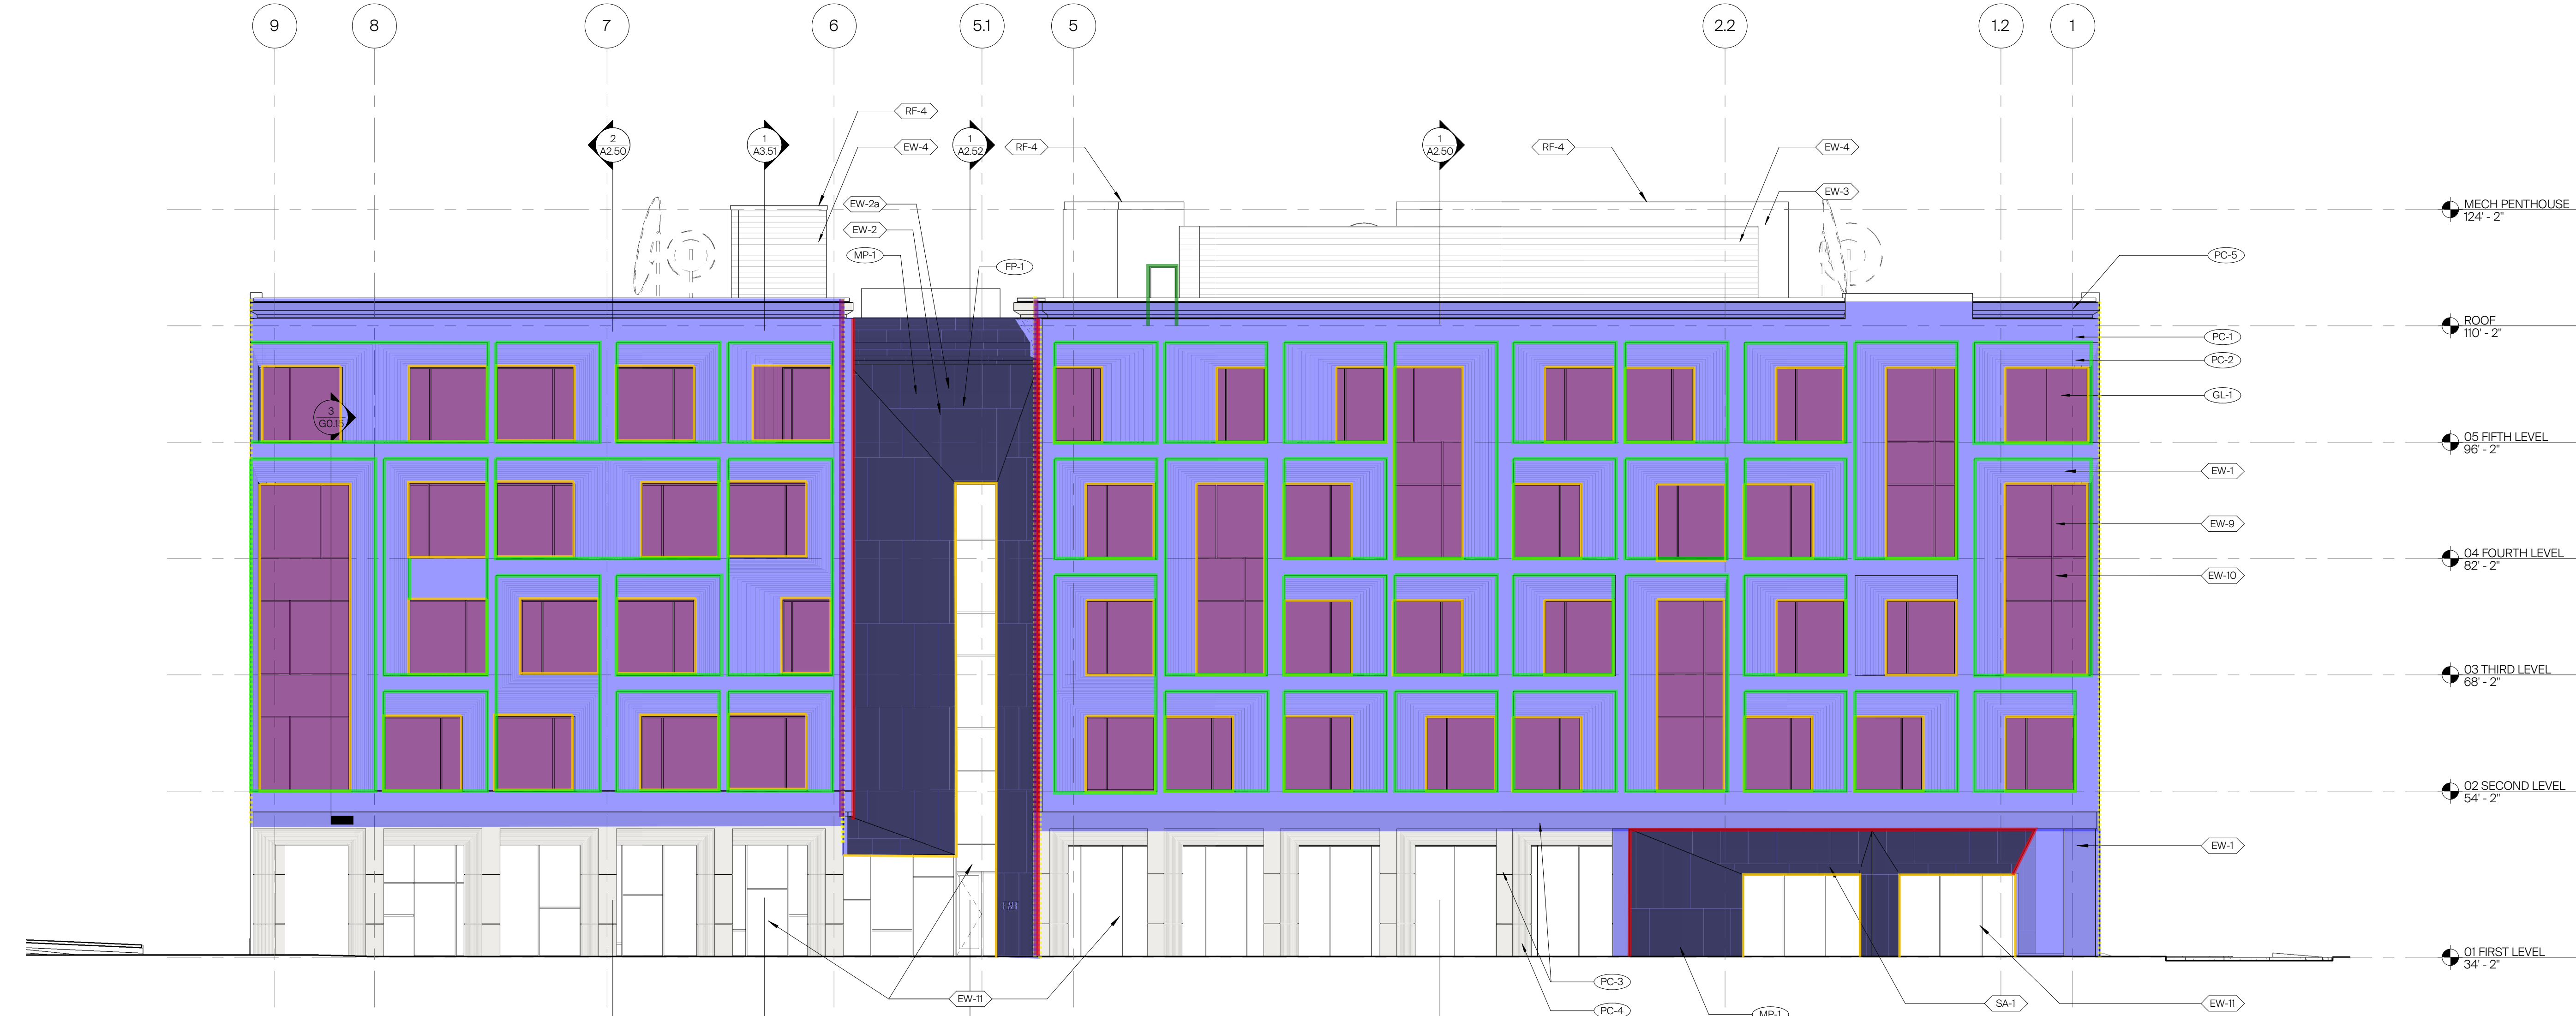

1 NORTH ELEVATION

3/32" = 1'-0"

0 4' 8' 16'

Subject	Length-FT	Area - Single	Area 1	CJ Length
Air & Vapor barrier at Exterior CMU walls - Area	579	0	3,654	0.00
Air & Vapor barrier at Exterior sheathing walls - Area	-3014	0	-7344	0.00
Air & Vapor barrier at Exterior sheathing walls - Area	1,790	0	22,994	0.00
Air & Vapor Barrier at Exterior Sheathing Wall - LF	141	1,317	0	18.66
Sealant at exterior concrete panel -to- exterior concrete panel joints - LF	4,050	0	0	0.00
Sealant at exterior concrete panel -to- exterior concrete panel joints - LF	571	0	0	0.00
Sealant at exterior HM door frame -to- exterior veneer joints - LF	76	0	0	0.00
Sealant at precast panel -to- metal panel joints - LF	310	0	0	0.00
Sheet membrane waterproofing - cants + details at corners + Termination Bar - LF	263	0	0	0.00
Sheet membrane waterproofing at below grade walls - Area	542	0	4,150	0.00
Sheet membrane waterproofing at below grade walls - LF	17	140	0	8.00
Transition membrane Flashing at openings in exterior wall - LF	3,182	0	0	0.00
Transition membrane Flashing at corners of the exterior wall - LF	425	0	0	0.00

REVISION INFORMATION

PROJECT # 21045
ISSUE DATE 2021.10.29

ELEVATIONS

A2.01


GL-1	7" INSULATED LOW-E VISION GLASS - BASIS OF DESIGN VIRACON VIREN-4322
SP-1	1" INSULATED LOW-E SPANDREL GLASS - BASIS OF DESIGN VIRACON VIREN-4322
WW-1	OLDCASTLE BUILDING ENVELOPE SIGNATURE SERIES SIGHT WINDOW WALL, OR APPROVED EQUIV. - BLACK ANODIZED
WW-2	ACURITE SINGLE PITCH SKYLIGHT - CLEAR ANODIZED (U VALUE 0.50 MAX, SHGC 0.40 MAX)
PC-1	TRADITIONAL PRECAST PANEL WITH LIGHT CONCRETE AND A HONED FINISH-BASIS OF DESIGN GATE PRECAST CUSTOM MIX
PC-2	TRADITIONAL PRECAST PANEL WITH LIGHT CONCRETE AND A ACID ETCH FINISH-BASIS OF DESIGN GATE PRECAST CUSTOM MIX
PC-3	DECAT PRECAST PANEL WITH DARK CONCRETE AND A HONED FINISH-BASIS OF DESIGN GATE PRECAST CUSTOM MIX
PC-4	DECAT PRECAST PANEL WITH DARK CONCRETE AND A ACID ETCH FINISH-BASIS OF DESIGN GATE PRECAST CUSTOM MIX
PC-5	TRADITIONAL PRECAST PANEL WITH DARK CONCRETE AND A HONED FINISH-BASIS OF DESIGN GATE PRECAST CUSTOM MIX
FP-1	FIBROUS PANEL W/ CONCEALED FASTENERS - BASIS OF DESIGN FINDERMAX XL
GL-2	GLASS RAIL - BASIS OF DESIGN TREX COMMERCIAL TRACK RAIL SYSTEM
MP-1	ALUMINUM COMPOSITE METAL PANEL SYSTEM WITH MATCHING CORUGATED ALTERNATE
MP-2	MORIN CORRUGATED METAL PANEL SYSTEM - EXPOSED FASTENER - BR7-35 - COLOR BTD
MG-1	ALUMINUM CANTILEVERED GATE, AMERICA'S GATE HARDWARE W PALM SHIELD SOLID METAL PANEL INFILL, 24" OPENING WIDTH X 12' TALL

RW1	ROOF WALKWAY PROTECTION: 125 MIL TPO, EXTRUDED AND EMBOSSED TEXTURE. INSTALL WALKWAY PROTECTION AT ALL ROOF ACCESS POINTS, DOORS, LADDERS, ROOF HATCHES, SPLASH BLOCKS, ETC. (TYP)
RD1	DUAL ROOF DRAIN OVERFLOW ROUTED TO DAYLIGHT
DS1	CLOSED-FACE PREFINISHED METAL DOWNSPOUT, COLOR TO MATCH PC3. WHERE GUTTERS EXTEND TO FINISHED GRADE, CONNECT TO UNDERGROUND STORMWATER SYSTEM, WHERE DOWNSPOUTS DISCHARGE TO LOWER ROOF SURFACES, PROVIDE RPI.
SC1	PREFINISHED METAL THROUGH-WALL SCUPPER - COLOR TO MATCH PC3.

SAFETY TIE-BACK ANCHORS AT ALL ROOFS SHALL BE A DELEGATED DESIGN SERVICE BY THE GC. ALL LOCATIONS, QUANTITIES AND CONNECTIONS SHALL BE ARRANGED, ENGINEERED, AND DETAILABLE BY A LICENSED STRUCTURAL ENGINEER TO MEET ALL APPLICABLE CODES (BOCA, AISC, ACI) AS WELL AS ALL DEAD, LIVE, WIND, AND ULTIMATE FORCE LOADS. PRIOR TO CONSTRUCTION, MANUFACTURER SHALL SUBMIT PRELIMINARY LAYOUT AND DETAILS FOR ARCHITECT'S INITIAL REVIEW AND COORDINATION WITH OTHER ROOFING ELEMENTS. DETAILS FOR WATER PENETRATING AT TIE-ROCK ANCHOR PENETRATIONS SHALL BE REVIEWED WITH THE PRE-INSTALLATION CONFERENCES PRIOR TO THE CONSTRUCTION OF THE MAIN MCKUP INDICATED IN THE DRAWINGS.

1. EJ - MASONRY EXPANSION JOINT
2. FOR WINDOW ELEVATIONS SEE SHEET A7.5

EW-1	PRECAST CONCRETE - SEE GO.06
EW-1B	METAL FRAMING WITH STONE VENEER - SEE GO.06
EW-2	METAL STUD FRAMING WITH ACM PANEL - SEE GO.06
EW-3	METAL STUD FRAMING WITH ACM PANEL - SEE GO.06
EW-2A	METAL STUD FRAMING WITH ACM PANEL (ALT) - SEE GO.06
EW-4	TUBE STEEL WITH METAL SCREEN - SEE GO.06
EW-5	CONCRETE WITH STONE VENEER - SEE GO.06
EW-5A	INSULATED PRECAST PANEL - SEE GO.06
EW-6	CONCRETE FOUNDATION STEM WALL - SEE GO.07
EW-7	CONCRETE RETAINING WALL - SEE GO.07
EW-8	CONCRETE EXPOSED RETAINING WALL - SEE GO.07
EW-9	SSG CURTAIN WALL - SEE GO.07
EW-10	SSG CURTAIN WALL SPANDREL - SEE GO.07
EW-11	FRONT SET STOREFRONT - SEE GO.07
SA-1	ACM SOFFIT ASSEMBLY - SEE GO.06
SA-1A	FIBROUS PANEL SOFFIT - SEE GO.06
RF-1	PAVERS OVER CONCRETE - SEE GO.08
RF-2	PAVERS ON INSULATION OVER CONCRETE - SEE GO.08
RF-3	TRAYS OVER CONCRETE - SEE GO.08
RF-4	POLYISO ON CONCRETE - SEE GO.08
RF-5	POLYISO ON METAL DECK WITH SFPM - SEE GO.08
RF-6	POLYISO ON CONCRETE WITH BALLAST - SEE GO.08
RF-7	POLYISO ON DECK WITH BALLAST - SEE GO.08
PG-2	CIP CONCRETE ON GRADE - SEE GO.08

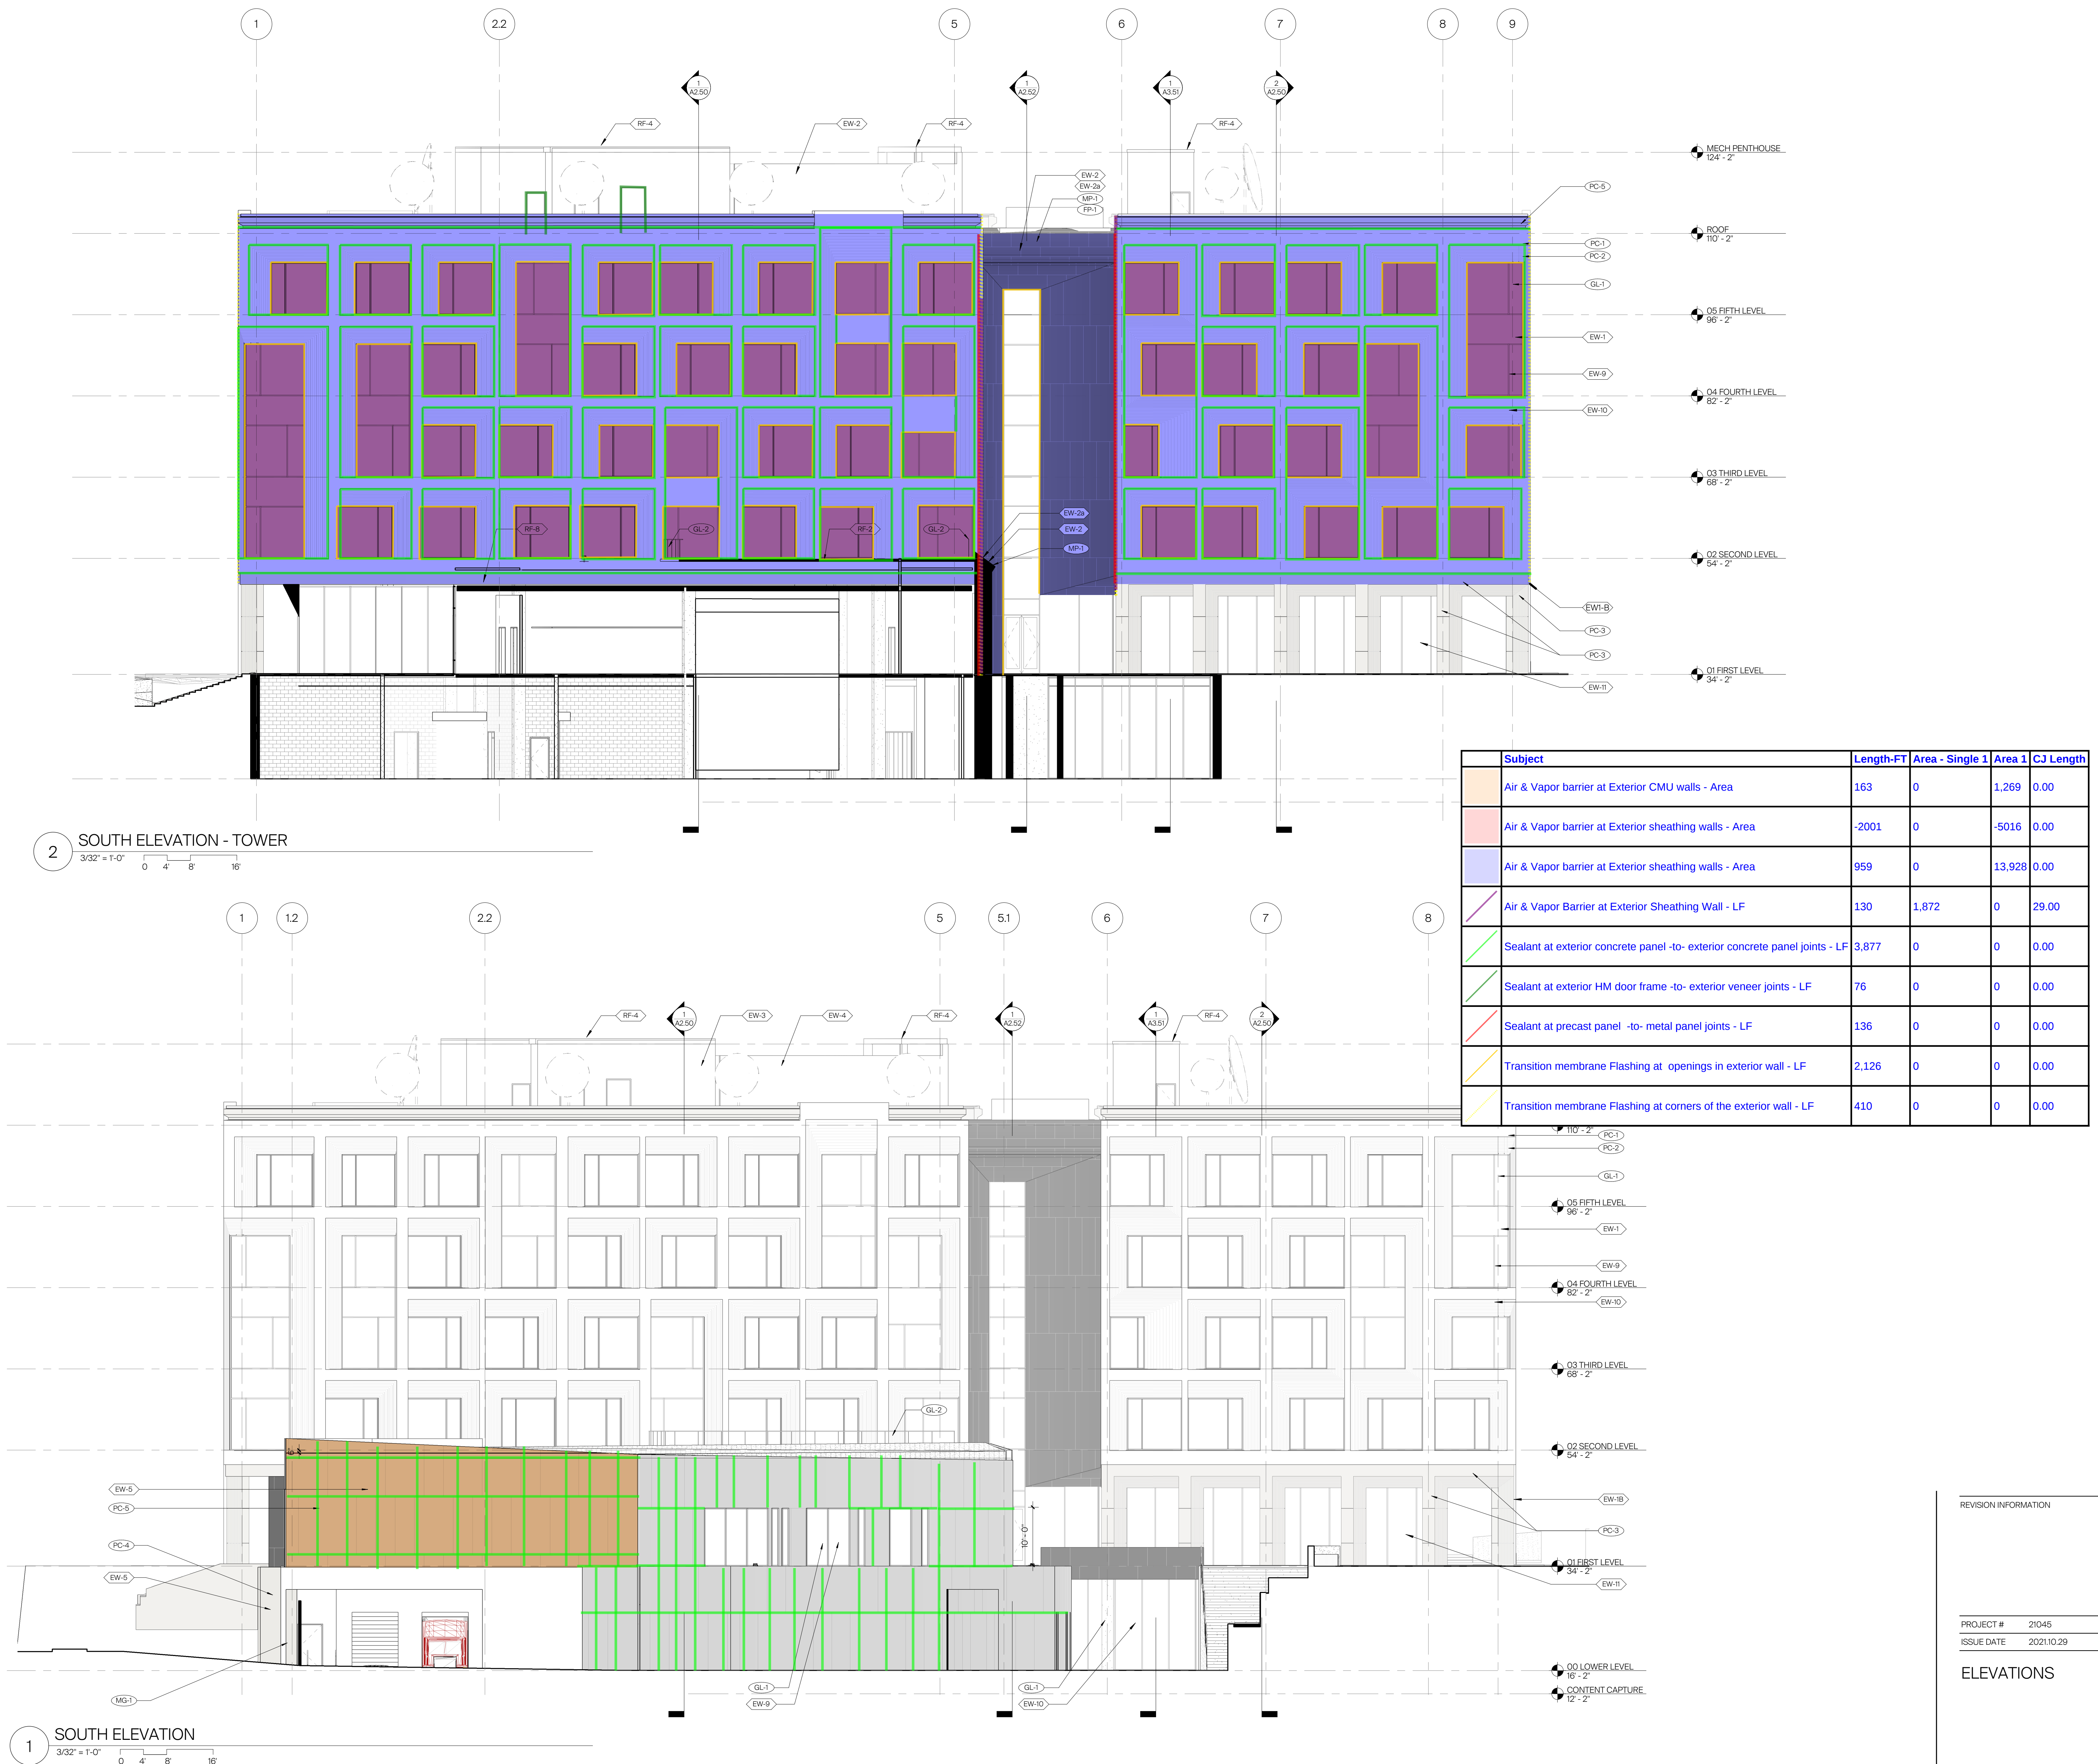

REVISION INFORMATION

PROJECT #	21045
ISSUE DATE	2021.10.29

ELEVATIONS

EXTERIOR MATERIALS LEGEND

- GL-1

1" INSULATED LOW-E VISION GLASS - BASIS OF DESIGN
VIRACON VREI-4322
- SP-1

1" INSULATED LOW-E SPANDREL GLASS - BASIS OF DESIGN
VIRACON VREI-4322
- HW-1

OLDCASTLE BUILDING ENVELOPE SIGNATURE SERIES SIGHT
WINDOW WALL OR APPROVED EQUAL - BLACK ANODIZED
- WW-2

ACURITE SINGLE PITCH SKYLIGHT - CLEAR ANODIZED (U
VALUE 0.50 MAX, SHGC 0.40 MAX)
- PC-1

TRADITIONAL PRECAST PANEL WITH LIGHT CONCRETE AND A
HONED FINISH-BASIS OF DESIGN GATE PRECAST CUSTOM
MIX
- PC-2

TRADITIONAL PRECAST PANEL WITH LIGHT CONCRETE AND A
ACID ETCH FINISH-BASIS OF DESIGN GATE PRECAST CUSTOM
MIX
- PC-3

DEX PRECAST PANEL WITH DARK CONCRETE AND A HONED
FINISH-BASIS OF DESIGN GATE PRECAST CUSTOM MIX
- PC-4

DEX PRECAST PANEL WITH DARK CONCRETE AND A ACID
ETCH FINISH-BASIS OF DESIGN GATE PRECAST CUSTOM MIX
- PC-5

TRADITIONAL PRECAST PANEL WITH DARK CONCRETE AND A
HONED FINISH-BASIS OF DESIGN GATE PRECAST CUSTOM
MIX
- FP-1

FIBROUS PANEL W/ CONCEALED FASTENERS - BASIS OF
DESIGN FUNDERMAX XL
- GL-2

GLASS RAIL - BASIS OF DESIGN TREX COMMERCIAL TRACK
RAIL SYSTEM
- MP-1

ALUMINUM COMPOSITE METAL PANEL SYSTEM WITH
MATCHING COPING (ALTERNATE)
- MP-2

MORIN CORRUGATED METAL PANEL SYSTEM - EXPOSED
FASTENER - BR7-35 - COLOR TBD
- MG-1

ALUMINUM CANTILEVERED GATE. AMERICA'S GATE
HARDWARE W/ PALM SHIELD SOLID METAL PANEL INFILL. 24'
OPENING WIDTH X 12' TALL

ROOFING MATERIALS LEGEND

- RW1

ROOF WALKWAY PROTECTION, 125 MIL TPO, EXTRUDED AND
EMBOSSSED TEXTURE. INSTALL WALKWAY PROTECTION AT ALL
ROOF ACCESS POINTS, DOORS, LADDERS, ROOF HATCHES,
SPASH BLOCKS, ETC. (TYP)
- RDI

DUAL ROOF DRAIN OVERFLOW ROUTED TO DAYLIGHT
- DSI

CLOSED-FACE PREFINISHED METAL DOWNSPOUT, COLOR TO
MATCH PC3. WHERE GUTTERS EXTEND TO FINISHED GRADE,
CONNECT TO UNDERGROUND STORMWATER SYSTEM. WHERE
DOWNSPOUTS DISCHARGE TO LOWER ROOF SURFACES,
PROVIDE RPI
- SCI

PREFINISHED METAL THROUGH-WALL SCUPPER - COLOR TO
MATCH PC3.

DELEGATED DESIGN NOTE

SAFETY TIE-BACK ANCHORS AT ALL ROOFS SHALL BE A DELEGATED
DESIGN SERVICE BY THE GC. ALL LOCATIONS, QUANTITIES AND
CONNECTIONS SHALL BE ARRANGED, ENGINEERED, AND DETAILED BY
A LICENSED STRUCTURAL ENGINEER TO MEET ALL APPLICABLE
CODES (OSHA, ANSI, ETC) AS WELL AS REQUIRED STATIC AND
ULTIMATE FORCE LOADS. PRIOR TO CONSTRUCTION,
MANUFACTURER SHALL SUBMIT PRELIMINARY LAYOUT AND DETAILS
FOR ARCHITECTS' INTIAL REVIEW AND COORDINATION WITH OTHER
ROOFING ELEMENTS. DETAILS FOR WATERPROOFING AT ALL TIE-
BACK ROOF PENETRATIONS SHALL BE REVIEWED AT THE PRE-
INSTALLATION CONFERENCES PRIOR TO THE CONSTRUCTION OF THE
MAIN MOCKUP INDICATED IN THE DRAWINGS.

ELEVATION GENERAL NOTES

1. E-J - MASONRY EXPANSION JOINT
2. FOR WINDOW ELEVATIONS SEE SHEET A7.5

EXTERIOR ASSEMBLIES LEGEND

- EW-1

PRECAST CONCRETE - SEE G0.06
- EW-1B

METAL FRAMING WITH STONE VENEER - SEE G0.06
- EW-2

METAL STUD FRAMING WITH ACM PANEL - SEE G0.06
- EW-3

METAL STUD FRAMING WITH ACM PANEL - SEE G0.06
- EW-2B

METAL STUD FRAMING WITH ACM PANEL (ALT) - SEE G0.06
- EW-4

TUBE STEEL WITH METAL SCREEN - SEE G0.06
- EW-5

CONCRETE WITH STONE VENEER - SEE G0.06
- EW-5B

INSULATED PRECAST PANEL - SEE G0.06
- EW-6

CONCRETE FOUNDATION STEM WALL - SEE G0.07
- EW-7

CONCRETE RETAINING WALL - SEE G0.07
- EW-8

CONCRETE EXPOSED RETAINING WALL - SEE G0.07
- EW-9

SSG CURTAIN WALL - SEE G0.07
- EW-10

SSG CURTAIN WALL SPANDREL - SEE G0.07
- EW-11

FRONT SET STOREFRONT - SEE G0.07
- SA-1

ACM SOFFIT ASSEMBLY - SEE G0.06
- SA-1B

FIBROUS PANEL SOFFIT - SEE G0.06
- RF-1

PAVERS OVER CONCRETE - SEE G0.08
- RF-2

PAVERS ON INSULATION OVER CONCRETE - SEE G0.08
- RF-3

TRAYS OVER CONCRETE - SEE G0.08
- RF-4


POLYISO ON CONCRETE - SEE G0.08
- RF-5

POLYISO ON METAL DECK WITH SPM - SEE G0.08
- RF-6

POLYISO ON CONCRETE WITH BALLAST - SEE G0.08
- RF-7

POLYISO ON DECK WITH BALLAST - SEE G0.08
- PZ-2

CIP CONCRETE ON GRADE - SEE G0.08

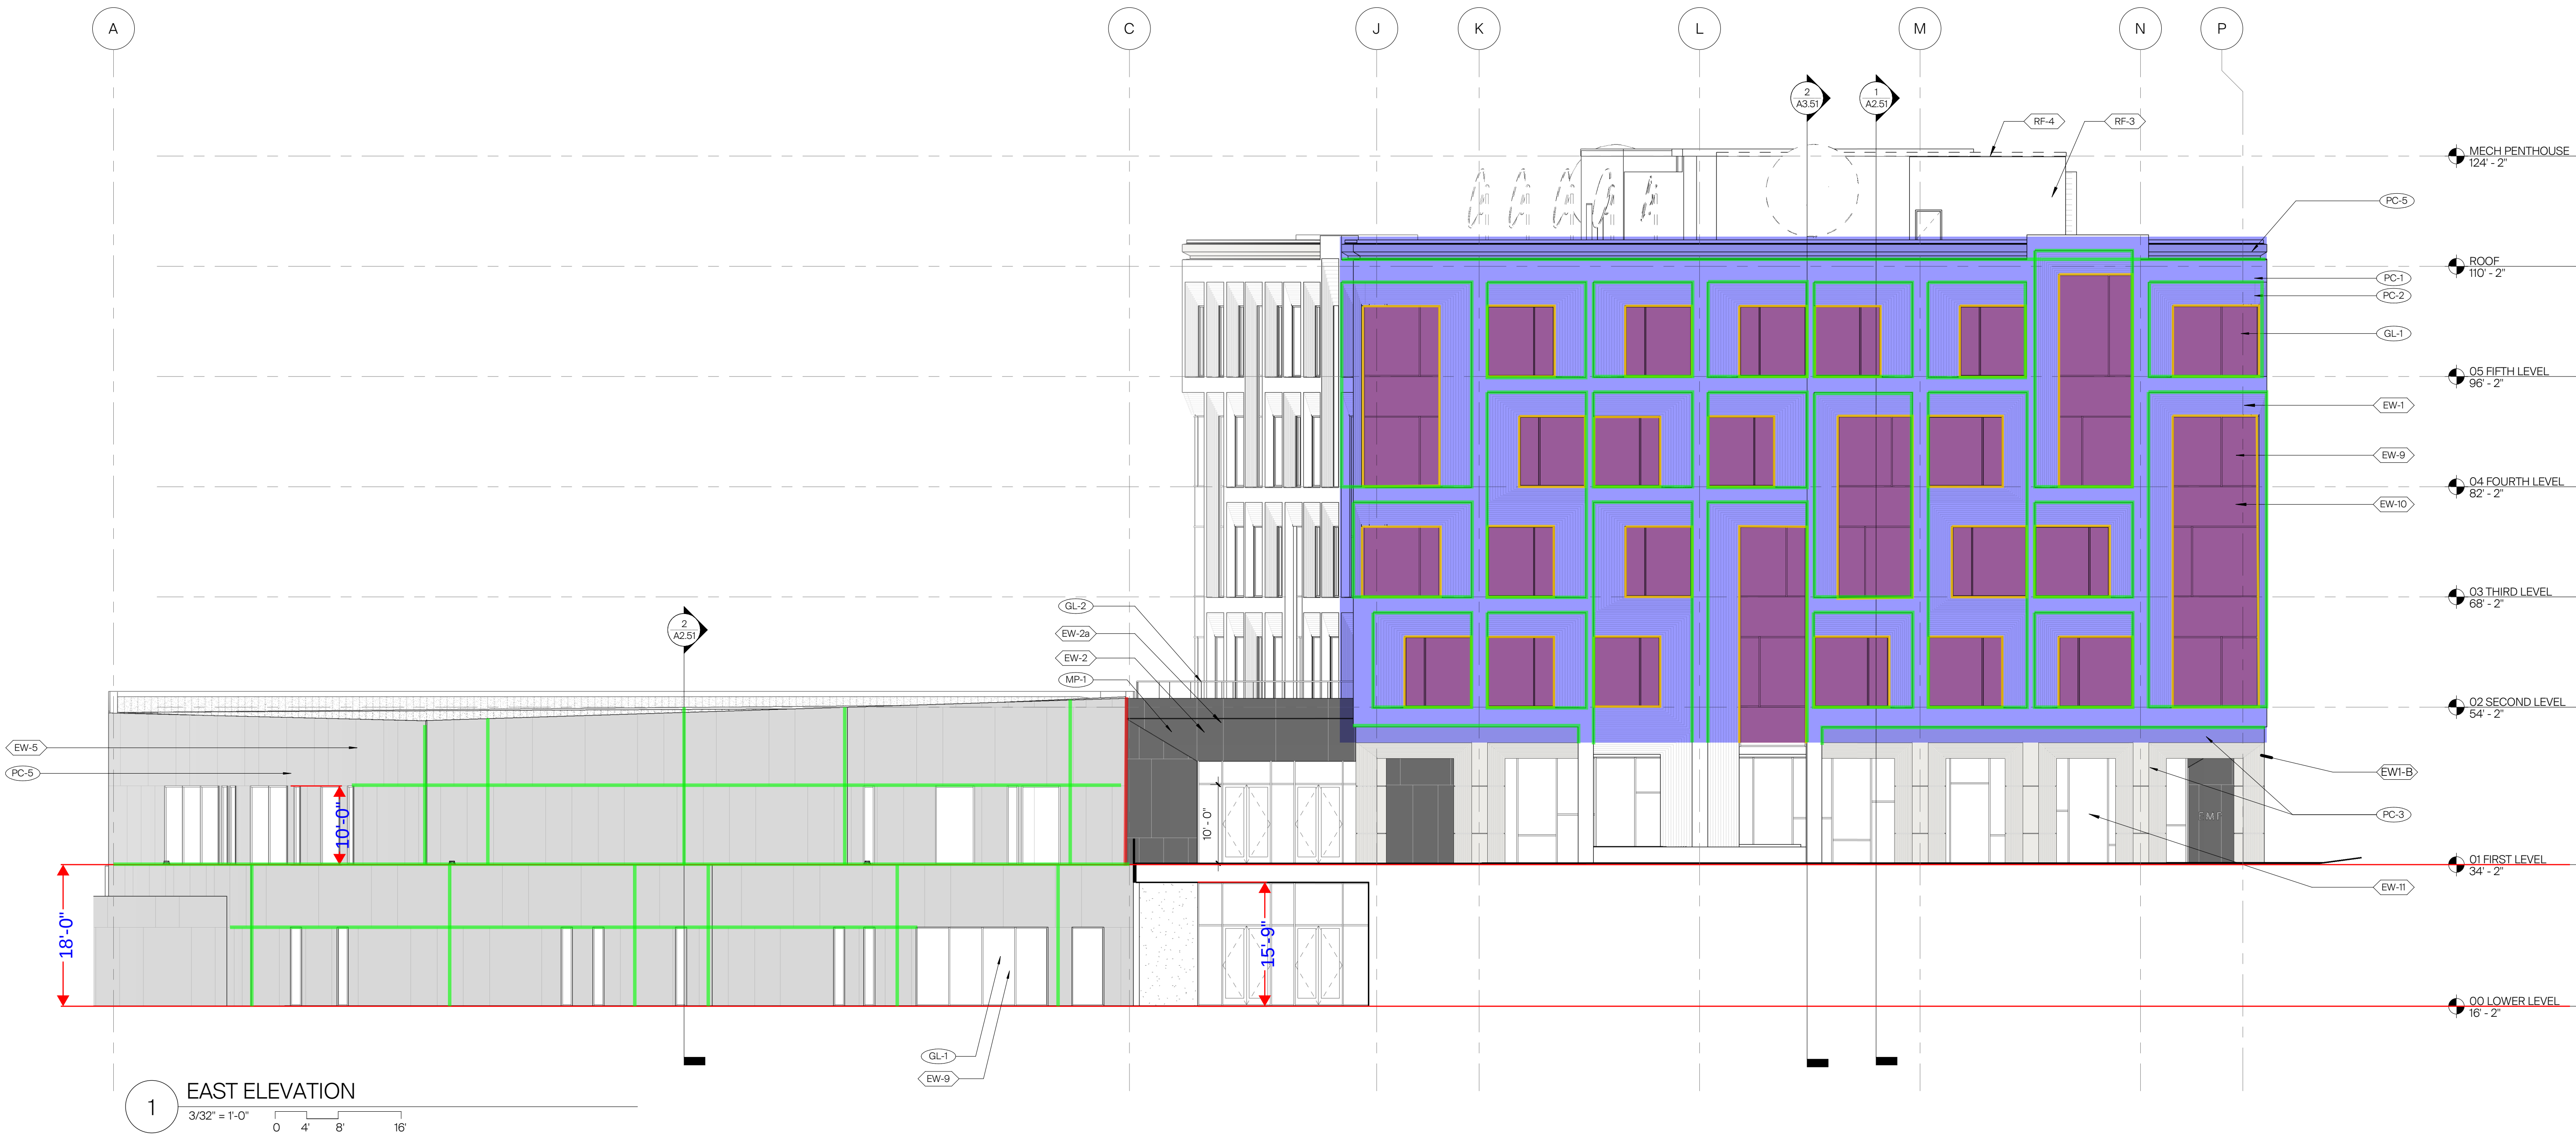

	Subject	Length-FT	Area - Single 1	Area 1	CJ Length
	Air & Vapor barrier at Exterior sheathing walls - Area	-1121	0	-2999	0.00
	Air & Vapor barrier at Exterior sheathing walls - Area	364	0	7,562	0.00
	Length Measurement	44	0	0	0.00
	Sealant at exterior concrete panel -to- exterior concrete panel joints - LF	2,107	0	0	0.00
	Sealant at precast panel -to- metal panel joints - LF	21	0	0	0.00
	Transition membrane Flashing at openings in exterior wall - LF	1,117	0	0	0.00

REVISION INFORMATION

PROJECT # 21045
ISSUE DATE 2021.10.29

ELEVATIONS

GENERAL RCP NOTES

1. PAINT ALL GYPSUM BOARD CEILINGS UON.
2. ALL LIGHT FIXTURES TO BE INSTALLED PER THE ARCHITECTURAL REFLECTED CEILING PLAN. SEE ELECTRICAL DRAWINGS FOR FIXTURES SPECIFICATIONS. IF A CONFLICT EXISTS BETWEEN THE ARCHITECTURAL AND ENGINEERING PLANS, NOTIFY THE ARCHITECT IN WRITING FOR DIRECTION PRIOR TO PROCEEDING.
3. WHERE PENDANT LIGHT FIXTURES ARE UTILIZED, GC TO PROVIDE APPROPRIATE BLOCKING FOR FIXTURE WEIGHT AND ASSEMBLY.
4. GC TO VERIFY THE CEILING LAYOUT CAN BE ACCOMPLISHED WITH FIELD CONDITIONS. COORDINATE CEILING SYSTEMS, MECHANICAL DIFFUSERS AND LIGHT FIXTURES. CONTACT THE ARCHITECT FOR DIRECTION SHOULD A CONFLICT EXIST.
5. WHERE ACOUSTICAL CEILING TILE IS TO BE INSTALLED, CENTER THE CEILING GRID WITHIN THE ROOM IN BOTH DIRECTIONS UON.
6. CENTER ALL DEVICES IN CEILING TILES UON CENTER ALL EXIT SIGNS ON HALL OR OPENING.
7. SPRINKLER HEADS WITHIN GYPSUM BOARD CEILINGS TO BE FULLY CONCEALED WITH WHITE COVER PLATES. SPRINKLER LOCATIONS SHOWN ARE FOR DESIGN INTENT. VERIFY LOCATIONS WITH FIRE MARSHAL PRIOR TO INSTALLATION.
8. PROVIDE SWITCHES FOR EACH FIXTURE TYPE WITHIN AN ENCLOSED ROOM UON. GANG MULTIPLES SWITCHES WITHIN A SINGLE COVER PLATE. IF GANGING OF SWITCHES IS NOT POSSIBLE, INDIVIDUAL SWITCHES SHALL BE EQUALLY SPACED 1-1/2' APART AND LOCATED AT THE SAME HEIGHT AFF.
9. WHEN GRAPHICALLY DEPICTED IN SIMILAR LOCATIONS, ALIGN OUTLETS, THERMOSTATS, AND/OR FIRE PROTECTION DEVICES VERTICALLY. OUTLETS TO BE CENTERED IN A PARTICULAR WALL SHOULD BE MEASURED IN THE FIELD AND LOCATED IN THE CENTER OF THE WALL UON. CONTACT ARCHITECT IF CLARIFICATION IS NEEDED. ALL CEILING MOUNTED DEVICES TO BE WHITE UNLESS OTHERWISE NOTED.
10. FOR ALL CEILING ELEMENTS NOT SPECIFICALLY DIMENSIONED, REFER TO THE GENERAL ALIGNMENT DIAGRAMS ON A6.00.
11. GC IS RESPONSIBLE FOR QUANTITIES, COORDINATION AND PROPER SIZING OF REQUIRED ACCESS PANELS IN ALL HARD CEILINGS - INCLUDING BUT NOT LIMITED TO PANELS TO ACCESS THE FOLLOWING: MECH UNITS, MECH DAMPERS, PLUMBING / SPRINKLER VALVES, CLEANOUTS, CONCEALED ELECTRICAL J-BOXES, LOW VOLTAGE ACCESS, MOTORIZED SHADES, MOTORIZED DOORS, REMOTE BALLASTS, FIXTURE DRIVERS, REMOTE DAMPERS, AND DEVICES REQUIRED BY AHJ / INSPECTORS.

KEYNOTES

- 1 XXX
- 2 XXX
- 3 XXX

CEILING TYPES

A2	ACT1 - REFER TO FINISH LEGEND
AB1	WOOD PANEL / SLATS - REFER TO FINISH LEGEND
AC1	AC1 - REFER TO FINISH LEGEND
FC1	FABRIC WRAPP ACOUSTIC CEILING - REFER TO FINISH LEGEND
G1	GYPSUM BOARD -PTD
W1	WOOD PANEL / SLATS - REFER TO FINISH LEGEND
X1	EXPOSED - K13 DRYFALL PT

RCP LEGEND

A/V FIXTURES

	PROJECTOR
	PROJECTOR SCREEN
	SPEAKER

ELECTRICAL FIXTURES

	CEILING MOUNTED J-BOX
	WALL MOUNTED J-BOX

EMERGENCY FIXTURES

	CEILING MOUNTED EXIT SIGN
	CEILING MOUNTED FIRE STROBE
	SPRINKLER
	WALL MOUNTED FIRE STROBE
	WALL MOUNTED EXIT SIGN

LIGHTING FIXTURES

	1X 4 CEILING MOUNTED FIXTURE
	1X 4 SUSPENDED FIXTURE
	2 X 2 DROP-IN LIGHT FIXTURE
	2 X 4 DROP-IN LIGHT FIXTURE
	CEILING FAN
	COVE LIGHTING
	LED STRIP LIGHTING
	PENDANT FIXTURE
	RECESSED CAN FIXTURE
	RECESSED WALL WASHER FIXTURE
	UNDER CABINET LIGHTING
	WALL MOUNTED FIXTURE
	WALL SCONCE

MECHANICAL FIXTURES

	ACCESS PANEL
	EXHAUST FAN
	RETURN GRILLE
	SUPPLY DIFFUSER
	LINEAR SUPPLY DIFFUSER



1 FIRST LEVEL REFLECTED CEILING PLAN
3/32\"/>


Subject	Length-FT	Area - Single 1	Area 1	CJ Length
Air & Vapor barrier at soffit - Area	655	0	3,639	0.00
Transition membrane Flashing at openings in exterior wall - LF	634	0	0	0.00
Transition membrane Flashing at corners of the exterior wall - LF	648	0	0	0.00

REVISION INFORMATION

PROJECT # 21045
ISSUE DATE 2021.10.29

FIRST LEVEL - RCP - ID

A6.01-ID

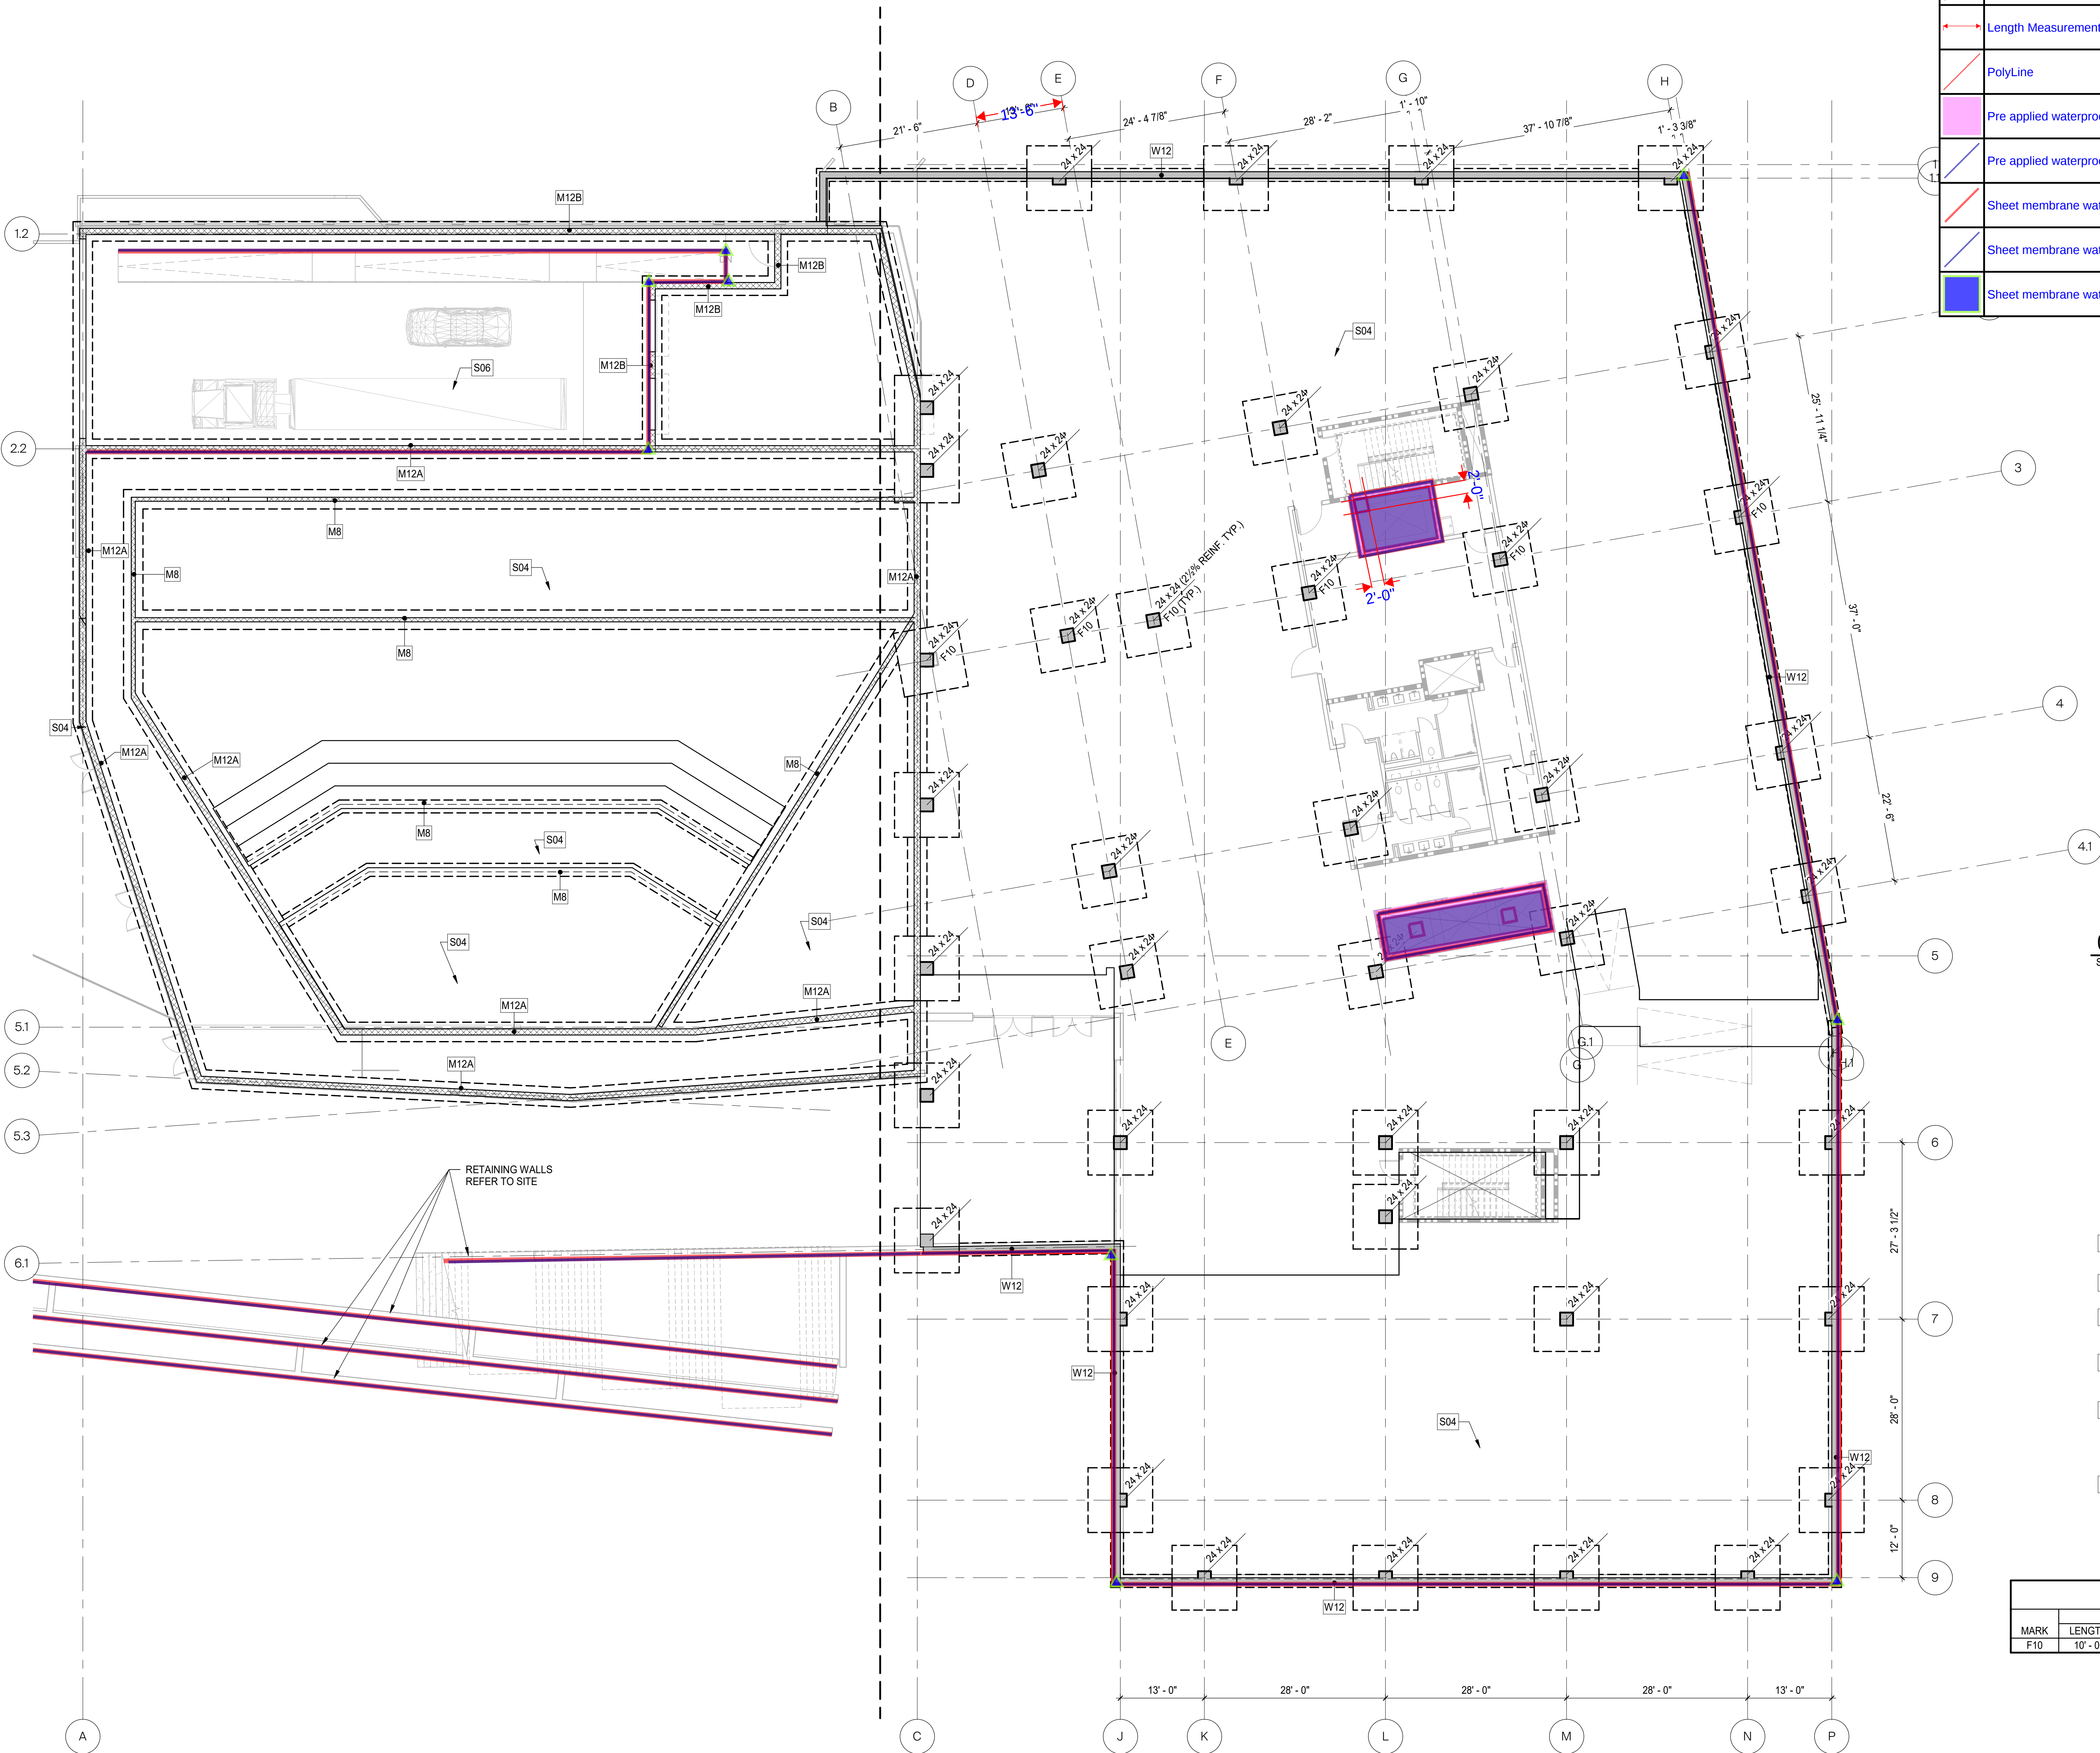

Subject	Length-FT	Area - Single	Area 1	CJ Length
Crystalline Waterproofing at elevator pit slab - Area	101	0	234	0.00
Crystalline Waterproofing at elevator pit walls - LF	124	549	0	16.00
Length Measurement	17	0	0	0.00
PolyLine	0	0	0	0.00
Pre applied waterproofing at below grade walls - Area	115	0	342	0.00
Pre applied waterproofing at below grade walls - LF	111	609	0	11.00
Sheet membrane waterproofing - cants + details at corners + Termination Bar - LF	1,197	0	0	0.00
Sheet membrane waterproofing at below grade walls - LF	1,085	14,172	0	82.00
Sheet membrane waterproofing details at vertical corners - EA	0	0	0	135.25

00 FOUNDATION PLAN

SCALE: 3/32" = 1'-0"

KEYNOTES

- R12** DENOTES 12" CONCRETE RETAINING WALL REINF. W/ #5 @ 12" E.W. E.F.
- S04** DENOTES 4" CONC SLAB REINFORCED W/ WWF 6x6-W1.4xW1.4 OVER 15 MIL. POLY VAPOR RETARDER OVER 4" GRANULAR BASE.
- S06** DENOTES 6" CONC SLAB REINFORCED W/ WWF 6x6-W2.9xW2.9 OVER 15 MIL. POLY VAPOR RETARDER OVER 4" GRANULAR BASE.
- 4C** DENOTES 4" CONC SLAB REINFORCED W/ WWF 6x6-W1.4xW1.4 OVER 1" 22 GAGE GALV. FORMDECK SUPPORTED BY W14 BEAMS & CROSS CHANNELS (PROJECTED WEIGHT OF STEEL 15PSF)
- 5 1/2 C** 5 1/2" LIGHT WEIGHT COMPOSITE FLOOR (110 PCF Fc = 4ksi) ON 2"-18 ga. GALV. COMPOSITE DECK.
- W12** DENOTES 12" CONCRETE RETAINING WALL REINF. W/ #5V @ 9" E.F AND #5H @ 12" E.F.
- R1** 1 1/2" TYPE B 20 GAGE ROOF DECK OVER W16 - W18 STEEL FRAMING MEMBERS SPACED @ 5'-0" O.C. ASSUME 5PSF TOTAL STEEL WEIGHT.
- R2** 1 1/2" TYPE B 20 GAGE ROOF DECK OVER BAR JOISTS SPACED @ 5'-0" O.C. ASSUME 7PSF TOTAL STEEL WEIGHT.
- M12A** DENOTES 12" CMU WALL GROUTED SOLID WITH #5 VERT. @ 24" O.C. OVER 3'-0" x 1'-4" FOOTING WITH 6-#5 x CONT. AND #4 TIES @ 24" O.C. REFER TO ALTERNATE 1 FOR ADDITIONAL INFORMATION
- M12B** DENOTES 12" CMU WALL GROUTED SOLID WITH #6 VERT. @ 32" O.C. OVER 3'-0" x 1'-4" FOOTING WITH 6-#5 x CONT. AND #4 TIES @ 24" O.C. REFER TO ALTERNATE 2 FOR ADDITIONAL INFORMATION

FOOTING SCHEDULE1					
MARK	LENGTH	SIZE	THICK.	REBAR	REMARKS
F10	10' - 0"	10' - 0"	3' - 0"	(11) #9 EA. WAY	

REVISION INFORMATION

PROJECT # 19XXX
ISSUE DATE

FOUNDATION PLAN

REFER TO NARRATIVE FOR ADDITIONAL INFORMATION

S1.0

	Project Name :-			
	Bid Date :-			
S.No.	Subject	Quantity	Unit	Remarks
	WORSHIP CENTER			
1	Sheet Membrane Waterproofing(WP1)			
	Sheet membrane waterproofing - cants + details at corners + Termination Bar	785	LFT	
	Sheet membrane waterproofing details at vertical corners	50	LFT	
	Sheet membrane waterproofing with drainage board and protection board at below grade walls	5420	SQFT	
3	Hot Applied Waterproofing (WP6)			
	Hot-applied waterproofing at deck	14435	SQFT	
	Hot-applied waterproofing details at corners + Termination Bar	470	LFT	
4	Air and Vapor Barrier(WP4)			
	Air & Vapor barrier at ext CMU walls	9575	SQFT	
	Transition membrane Flashing at all other locations (base, corners, openings)	800	LFT	
5	JOINT SEALANTS			
	Interior Building Sealants			
	Caulk at interior non-rated CMU Wall -to- int non-rated CMU Wall CJ	1,715	LFT	
	Caulk at interior non-rated CMU Wall -to- concrete column/ Wall CJ	40	LFT	
	Caulking at Interior HM Door frames to Interior CMU walls	270	LFT	
	Caulking at top of interior non-rated CMU Walls -to- Deck (Both Sides)	770	LFT	
	Exterior Building Sealants			
	Sealant at exterior precast panel -to- exterior precast panel joints	2360	LFT	
	Sealant at exterior HM door frame -to- exterior masonry veneer joints	150	LFT	
	Sealant at precast panel -to- metal panel joints	125	LFT	
	Sealant at exterior parapet cap -to- exterior veneer joints	760	LFT	
	Sealant at perimeter of exterior windows/storefront to exterior veneer	1000	LFT	
	TENANT BUILDOUT			
1	Sheet Membrane Waterproofing(WP1)			
	Sheet membrane waterproofing - cants + details at corners + Termination Bar	600	LFT	
	Sheet membrane waterproofing details at vertical corners	900	LFT	
	Sheet membrane waterproofing with drainage board and protection board at below grade walls	13000	SQFT	
2	Pre Applied Waterproofing (WP3)			
	Pre applied waterproofing underside of elevator pit slab	350	SQFT	
	Pre applied waterproofing at elevator pit walls	610	SQFT	230 LFT for details at corners
	Pre applied waterproofing underside of MDF DATA ROOM	1500	SQFT	
3	Hot Applied Waterproofing (WP6)			
	Hot-applied waterproofing at deck	1440	SQFT	
	Hot-applied waterproofing below topping slab	6150	SQFT	
	Hot-applied waterproofing details at corners + Termination Bar	670	LFT	
4	Air and Vapor Barrier(WP4)			
	Air and vapor barrier at soffit	6320	SQFT	
	Air & Vapor barrier at ext Sheathing walls	32,640	SQFT	
	Air & Vapor barrier at ext CMU walls	1425	SQFT	
	Transition membrane Flashing at all other locations (base, corners, openings)	8750	LFT	
5	JOINT SEALANTS			
	Interior Building Sealants			
	Caulk at interior non-rated CMU Wall -to- int non-rated CMU Wall CJ	1,265	LFT	
	Caulk at interior non-rated CMU Wall -to- concrete column/ Wall CJ	360	LFT	
	Caulking at Interior HM Door frames to Interior CMU walls	470	LFT	
	Caulking at top of interior non-rated CMU Walls -to- Deck (Both Sides)	560	LFT	
	Exterior Building Sealants			
	Sealant at exterior precast panel -to- exterior precast panel joints	10640	LFT	
	Sealant at exterior HM door frame -to- exterior masonry veneer joints	170	LFT	
	Sealant at precast panel -to- metal panel joints	475	LFT	
	Sealant at exterior masonry veneer -to- exterior soffit joints	1250	LFT	
	Sealant at exterior parapet cap -to- exterior veneer joints	690	LFT	
	Sealant at perimeter of exterior windows/storefront to exterior veneer	6000	LFT	
	Site Sealant			
	Sealant at sidewalk -to- sidewalk Expansion Joints	725	LFT	
	Sealant at sidewalk -to- sidewalk Expansion Joints (ALTERNATE)	875	LFT	
6	Resinous Flooring			
	Found no Epoxy flooring as per schedule			
7	Crystalline Waterproofing (WP3B)			
	Crystalline Waterproofing at elevator pit slab	250	SQFT	
	Crystalline Waterproofing at elevator pit walls	550	SQFT	